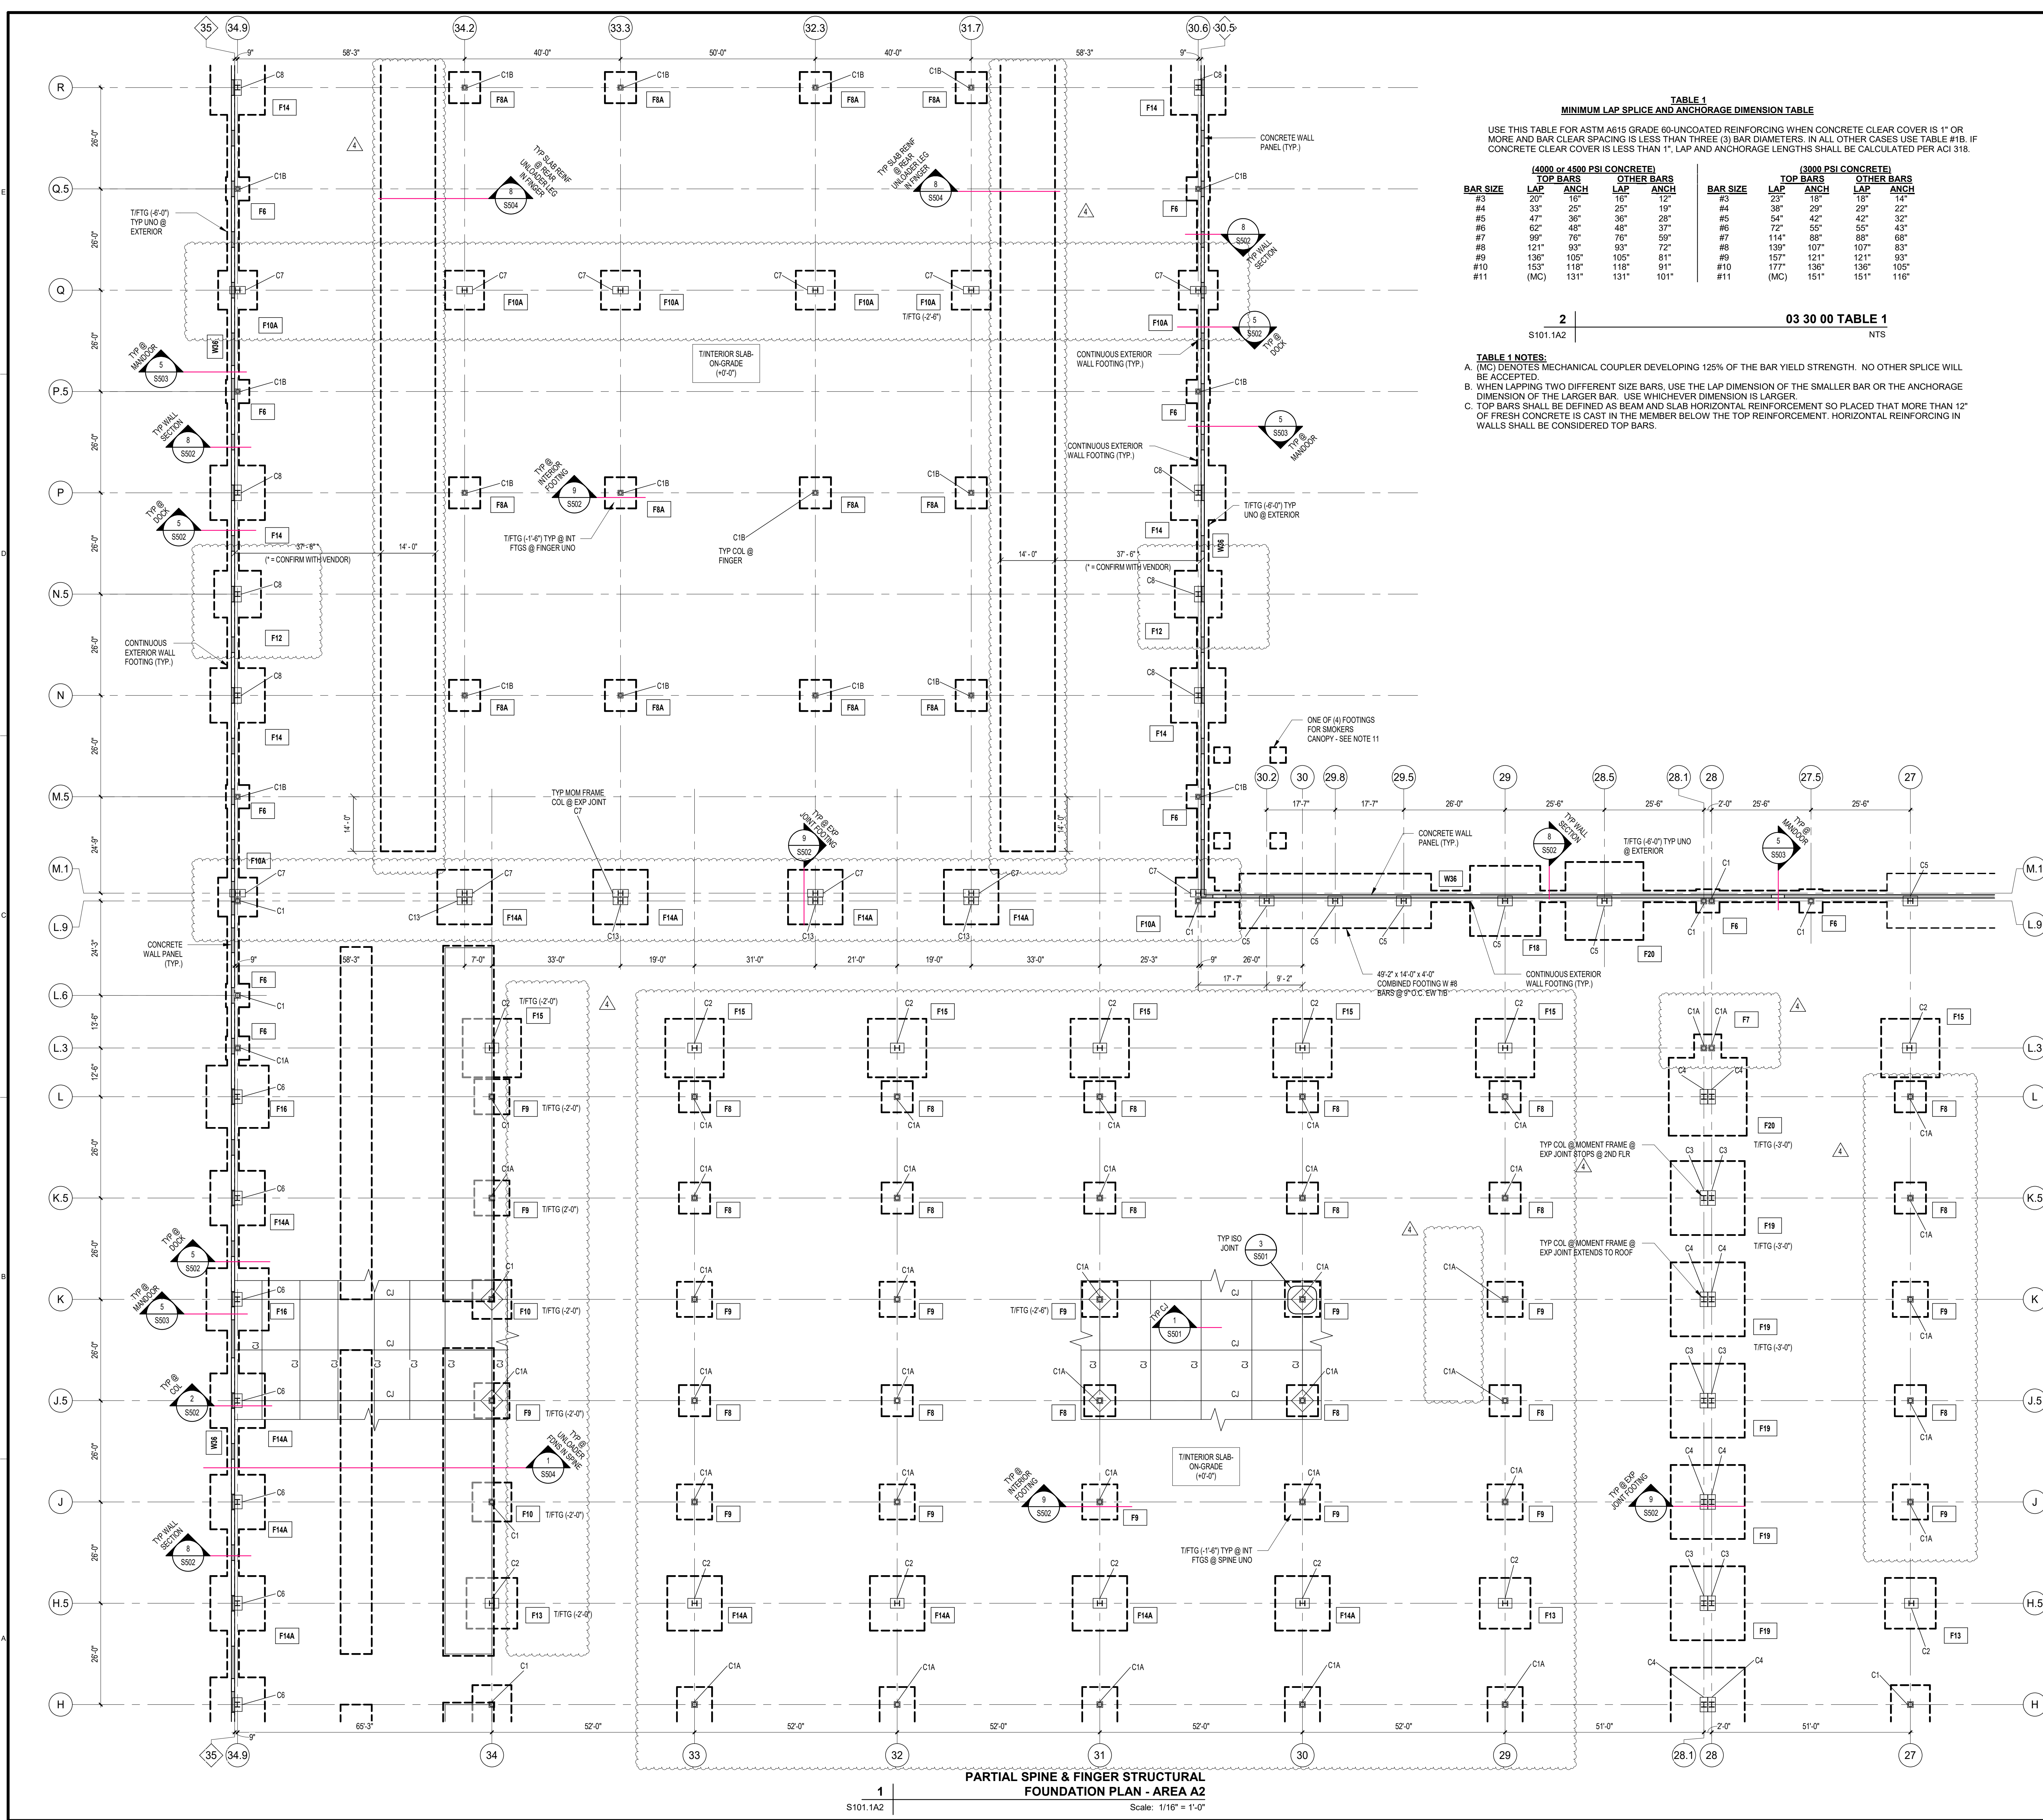




**TABLE 1**  
**MINIMUM LAP SPLICE AND ANCHORAGE DIMENSION TABLE**

USE THIS TABLE FOR ASTM A615 GRADE 60-UNCOATED REINFORCING WHEN CONCRETE CLEAR COVER IS 1" OR MORE AND BAR CLEAR SPACING IS LESS THAN THREE (3) BAR DIAMETERS. IN ALL OTHER CASES USE TABLE #1B. IF CONCRETE CLEAR COVER IS LESS THAN 1", LAP AND ANCHORAGE LENGTHS SHALL BE CALCULATED PER ACI 318.

| BAR SIZE | (4000 or 4500 PSI CONCRETE) |      | OTHER BARS |      | BAR SIZE | (3000 PSI CONCRETE) |      | OTHER BARS |      |
|----------|-----------------------------|------|------------|------|----------|---------------------|------|------------|------|
|          | LAP                         | ANCH | LAP        | ANCH |          | LAP                 | ANCH | LAP        | ANCH |
| #3       | 20"                         | 16"  | 16"        | 12"  | #3       | 23"                 | 18"  | 18"        | 14"  |
| #4       | 33"                         | 25"  | 25"        | 19"  | #4       | 38"                 | 29"  | 29"        | 22"  |
| #5       | 47"                         | 36"  | 36"        | 28"  | #5       | 54"                 | 42"  | 42"        | 32"  |
| #6       | 62"                         | 48"  | 48"        | 37"  | #6       | 72"                 | 55"  | 55"        | 43"  |
| #7       | 99"                         | 76"  | 76"        | 59"  | #7       | 114"                | 88"  | 88"        | 68"  |
| #8       | 121"                        | 93"  | 93"        | 72"  | #8       | 139"                | 107" | 107"       | 83"  |
| #9       | 136"                        | 105" | 105"       | 81"  | #9       | 157"                | 121" | 121"       | 93"  |
| #10      | 153"                        | 118" | 118"       | 91"  | #10      | 177"                | 136" | 136"       | 105" |
| #11      | (MC)                        | 131" | 131"       | 101" | #11      | (MC)                | 151" | 151"       | 116" |

**2** | **03 30 00 TABLE 1**  
S101.1A2 | NTS

**TABLE 1 NOTES:**  
A. (MC) DENOTES MECHANICAL COUPLER DEVELOPING 125% OF THE BAR YIELD STRENGTH. NO OTHER SPLICE WILL BE ACCEPTED.  
B. WHEN LAPPING TWO DIFFERENT SIZE BARS, USE THE LAP DIMENSION OF THE SMALLER BAR OR THE ANCHORAGE DIMENSION OF THE LARGER BAR. USE WHICHEVER DIMENSION IS LARGER.  
C. TOP BARS SHALL BE DEFINED AS BEAM AND SLAB HORIZONTAL REINFORCEMENT SO PLACED THAT MORE THAN 12" OF FRESH CONCRETE IS CAST IN THE MEMBER BELOW THE TOP REINFORCEMENT. HORIZONTAL REINFORCING IN WALLS SHALL BE CONSIDERED TOP BARS.

**FOUNDATION PLAN NOTES:**

- SEE SHEET S203 FOR SLAB-ON-GROUND DETAILS. TISLAB-ON-GROUND ELEVATION ABOVE MEAN SEA LEVEL = 845'-0" TO BE DATUM ELEVATION = +0'-0".
- SEE S101.10F FOR FOUNDATION DETAILS AT OFFICE BUMP-OUT.
- MAXIMUM CONTRACTION JOINT SPACING = 15'-0". SEE SHEET S501 FOR CONTROL AND CONSTRUCTION JOINT DETAILS.
- FOR DOOR OPENING SIZES AND LOCATIONS IN EXTERIOR WALLS SEE ARCHITECTURAL DRAWINGS.
- FOR SLAB AND FOUNDATION PENETRATIONS, SEE MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS.
- COORDINATE LOCATIONS, SIZES AND TYPES OF SLAB DEPRESSIONS, EQUIPMENT PADS, EMBEDMENTS AND PENETRATIONS WITH THE ARCHITECTURAL, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS.
- PERIMETER FOUNDATION WALL LOCATION TO COORDINATE WITH WALL PANEL THICKNESS.
- "FS" DENOTES FOOTING STEP. SEE S203/01. COORDINATE LENGTH & LOCATION OF FOOTING STEP WITH CONCRETE WALL PANEL LAYOUT.
- "CX" DENOTES COLUMN MARK. SEE SCHEDULE ON THIS SHEET.
- "FX" DENOTES FOOTING MARK. SEE SCHEDULE ON THIS SHEET.
- CANOPY FOUNDATIONS DESIGNED BY CANOPY MANUFACTURER (SIZE SHOWN AS PLACEHOLDER). COORDINATE FINAL LOCATION AND SIZE OF CANOPY FOUNDATIONS TO AVOID UNDERMINING BUILDING FOUNDATIONS.
- PROVIDE KNOCKOUT PANELS IN WALL FOR FUTURE DOOR DOOR OPENINGS AT THIS END OF FINGERS. SEE ARCH DRAWINGS AND S800 FOR REINFORCING AROUND FUTURE OPENINGS.

**PROJECT**  
**HUMMINGBIRD**  
**CENTRAL HUB GEN1.0 V1.1**  
2134 BLUE CREEK ROAD  
HOGANVILLE, GA 30230

**ARCHITECT**  
SEEFFERT DEV. MANAGEMENT INC.  
3333 RIVERWOOD PKWY, SUITE 200  
ATLANTA, GA 30339

**ENGINEERS/CONSULTANTS**  
**STRUCTURAL**  
AECOM  
277 Nationwide Blvd  
Columbus, OH 43215  
281.646.2400 tel  
www.aecom.com

**MEP**  
AECOM  
800 Gessner Rd  
Houston, TX 77024  
281.646.2400 tel  
www.aecom.com

**IT / SECURITY**  
AECOM  
800 Gessner Rd  
Houston, TX 77024  
281.646.2400 tel  
www.aecom.com

**FIRE PROTECTION / ALARM**  
AECOM  
800 Gessner Rd  
Houston, TX 77024  
281.646.2400 tel  
www.aecom.com

**FOOTING SCHEDULE**

| FOOTING MARK | SIZE (LxWxH)        | REINFORCING (BOTTOM, UNO)               | REFERENCE |
|--------------|---------------------|-----------------------------------------|-----------|
| F4           | 4'-0"x4'-0"x1'-6"   | w/ (10) - #6 Bars Each Way              |           |
| F5           | 5'-0"x5'-0"x1'-9"   | w/ (11) - #6 Bars Each Way              |           |
| F6           | 6'-0"x6'-0"x1'-9"   | w/ (8) - #6 Bars Each Way               |           |
| F7           | 7'-0"x7'-0"x2'-0"   | w/ (9) - #6 Bars Each Way               |           |
| F8           | 8'-0"x8'-0"x2'-0"   | w/ (10) - #6 Bars Each Way              |           |
| F8A          | 8'-0"x8'-0"x1'-9"   | w/ (8) - #6 Bars Each Way Top & Bottom  |           |
| F9           | 9'-0"x9'-0"x2'-6"   | w/ (14) - #8 Bars Each Way              |           |
| F10          | 10'-0"x10'-0"x2'-6" | w/ (11) - #7 Bars Each Way              |           |
| F10A         | 10'-0"x10'-0"x3'-0" | w/ (8) - #6 Bars Each Way Top & Bottom  |           |
| F11          | 11'-0"x11'-0"x2'-6" | w/ (14) - #7 Bars Each Way              |           |
| F12          | 12'-0"x12'-0"x3'-0" | w/ (15) - #8 Bars Each Way Top & Bottom |           |
| F13          | 13'-0"x13'-0"x4'-0" | w/ (16) - #8 Bars Each Way Top & Bottom |           |
| F14          | 14'-0"x14'-0"x3'-0" | w/ (14) - #8 Bars Each Way Top & Bottom |           |
| F14A         | 14'-0"x14'-0"x4'-0" | w/ (20) - #8 Bars Each Way Top & Bottom |           |
| F15          | 15'-0"x15'-0"x4'-0" | w/ (21) - #8 Bars Each Way Top & Bottom |           |
| F16          | 16'-0"x16'-0"x4'-0" | w/ (24) - #8 Bars Each Way Top & Bottom |           |
| F18          | 18'-0"x18'-0"x4'-0" | w/ (25) - #8 Bars Each Way Top & Bottom |           |
| F19          | 19'-0"x19'-0"x4'-0" | w/ (25) - #8 Bars Each Way Top & Bottom |           |
| F20          | 20'-0"x20'-0"x4'-0" | w/ (27) - #8 Bars Each Way Top & Bottom |           |

**COLUMN SCHEDULE**

ALL COLUMNS WITH A FLANGE THICKNESS EXCEEDING 2 INCHES SHALL BE SUPPLIED WITH SUPPLEMENTARY CHAMFY V-NOTCH REQUIREMENT S30.

| COLUMN MARK | COLUMN SIZE  | BASEPLATE SIZE (LxWxL)  | Description |
|-------------|--------------|-------------------------|-------------|
| C1          | HSS12x12x5/8 | 4'-0"x4'-0"x1'-6"       |             |
| C1A         | HSS12x12x1/2 | 4'-0"x4'-0"x1'-6"       |             |
| C1B         | HSS10x10x1/2 | 4'-0"x4'-0"x1'-6"       |             |
| C2          | W14x27       | 5'-3"x3'-2"x3'-0"x4'-2" |             |
| C3          | W14x25       | 5'-3"x3'-2"x4'-5"       |             |
| C4          | W14x25       | 5'-3"x3'-2"x4'-5"       |             |
| C5          | W14x31       | 5'-3"x3'-2"x4'-5"       |             |
| C6          | W14x21       | 5'-3"x3'-2"x3'-0"x4'-2" |             |
| C7          | W14x21       | 5'-3"x3'-2"x3'-0"x4'-2" |             |
| C8          | W12x15       | 5'-3"x3'-2"x4'-5"       |             |
| C9          | W10x6        | 5'-3"x3'-2"x4'-5"       |             |
| C10         | W12x15       | 5'-3"x3'-2"x4'-5"       |             |
| C11         | HSS8x8x5/8   | 5'-3"x3'-2"x4'-5"       |             |
| C12         | HSS8x8x5/8   | 5'-3"x3'-2"x4'-5"       |             |
| C13         | W14x27       | 5'-3"x3'-2"x4'-5"       |             |

**KEYPLAN**

Partial Spine & Finger Structural Foundation Plan - Area A2

**REGISTRATION**  
GEORGIA REGISTERED PROFESSIONAL ENGINEER  
ANDREW L. KATSE  
3-07-25  
03/07/2025

**REVISIONS**


| REV | DATE       | ISSUED TO | BY     | DESCRIPTION            |
|-----|------------|-----------|--------|------------------------|
| 1   | 11/15/2024 | AECOM     | AHJ    | ISSUE FOR BID & PERMIT |
| 2   | 03/07/2025 | AECOM     | ATHEVA | ADDENDUM #3            |
| 3   |            |           |        |                        |
| 4   |            |           |        |                        |

**PROJECT NUMBER**  
60735057

**SHEET TITLE**  
PARTIAL SPINE & FINGER STRUCTURAL FOUNDATION PLAN - AREA A2

**SHEET NUMBER**  
S101.1A2



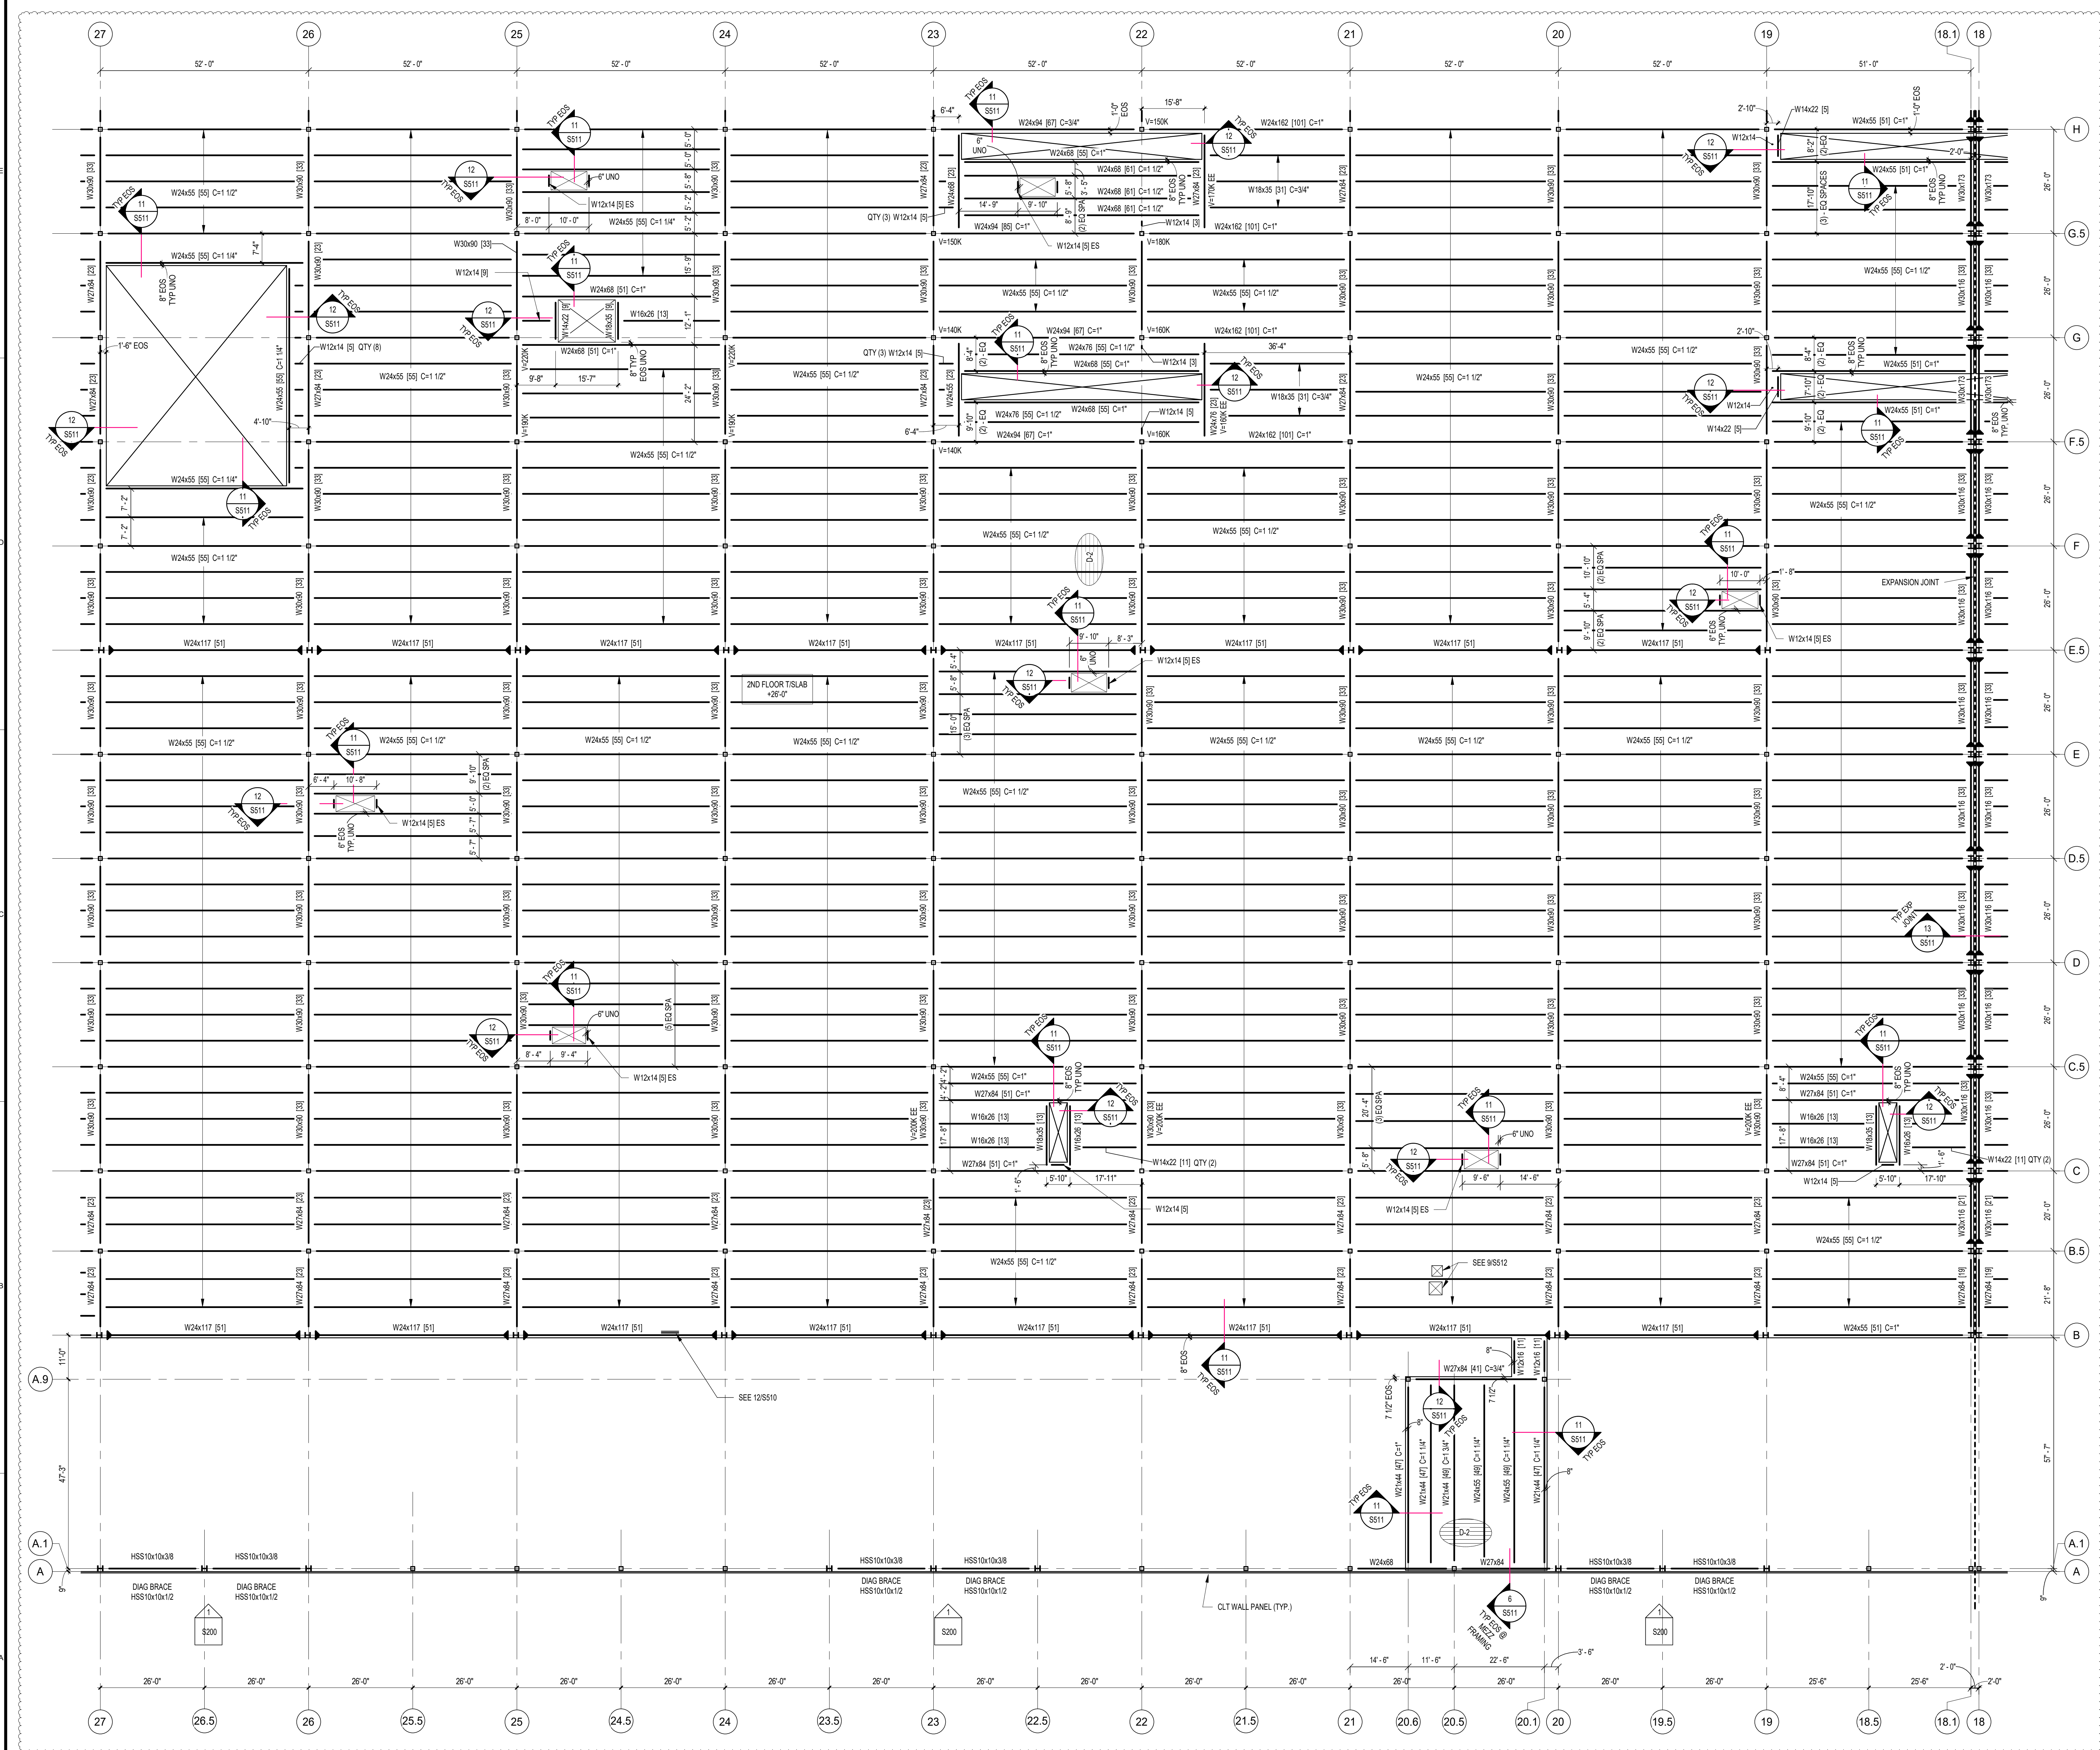

PARTIAL SPINE 2ND FLOOR FRAMING PLAN - AREA B1  
S101.2B1 Scale: 1/16" = 1'-0"

2ND FLOOR FRAMING PLAN NOTES:

1. TOP OF STEEL ELEVATION FOR 2ND FLOOR CONSTRUCTION IS (+25'-6") ABOVE DATUM FIRST FLOOR SLAB ELEVATION, UNLESS NOTED OTHERWISE BY +/- FROM 2ND FLOOR ELEVATION.
2. SEE DECK SCHEDULE ON S600 FOR FLOOR CONSTRUCTION DETAILS.
3. THE STEEL FABRICATOR SHALL DESIGN END SHEAR CONNECTIONS TO RESIST LRFD END REACTIONS DENOTED AS V=XXX ON BEAM LABELS. SEE TABLES ON SHEET S512 FOR REACTIONS NOT SHOWN.
4. FOR SIZES AND LOCATIONS OF FLOOR PENETRATIONS, SEE ARCHITECTURAL, MECHANICAL, AND PLUMBING DRAWINGS. MAJOR PENETRATIONS ARE DETAILED ON PLAN. FOR MINOR PENETRATIONS COOR LOCATIONS AND SIZE w/ ARCH/MEP/MHE AND SEE S511 FOR APPLICABLE FRAMING DETAILS.
5. (XX) DENOTES NUMBER OF 3/4" DIA. SHEAR STUDS FOR COMPOSITE SLAB TO BEAM CONNECTION. SEE DECK SCHEDULE FOR LENGTH.
6. ALL STAIR FRAMING SHALL BE DESIGNED BY THE STAIR MANUFACTURER.
7. DENOTES FULLY RESTRAINED MOMENT CONNECTION. SEE 1/SS12 FOR DETAILS.
8. SEE STRUCTURAL ELEVATIONS ON S200 FOR VERTICAL BRACING, GIRTS, HEADERS AND ADDITIONAL FRAMING INFORMATION.
9. PROVIDE (2) #3 BAR X 5'-0" AT REINTRAIT SLAB CORNERS. SEE DETAIL S5510.
10. COORDINATE ALL DIMENSIONS WITH ARCHITECTURAL DRAWINGS.
11. SEE S512 FOR MHE JUMPER BEAM DETAIL REQUIRED BELOW MHE POST LOADS ON MEZZ > 5 KIPS.



PROJECT

**HUMMINGBIRD**  
**CENTRAL HUB GEN1.0 V1.1**  
2134 BLUE CREEK ROAD  
HOGANSVILLE, GA 30230

CLIENT

SEEFRED DEV. MANAGEMENT INC.  
3333 RIVERWOOD PKWY, SUITE 200  
ATLANTA, GA 30339

ARCHITECT

ARCHITECT OF RECORD  
AECOM  
800 Gessner Rd  
Houston, TX 77024  
281.646.2400 tel  
www.aecom.com

ENGINEERS/CONSULTANTS

STRUCTURAL  
AECOM  
277 Nationwide Blvd  
Columbus, OH 43215  
281.646.2400 tel  
www.aecom.com

MEP  
AECOM  
800 Gessner Rd  
Houston, TX 77024  
281.646.2400 tel  
www.aecom.com

IT / SECURITY  
AECOM  
800 Gessner Rd  
Houston, TX 77024  
281.646.2400 tel  
www.aecom.com


FIRE PROTECTION / ALARM  
AECOM  
800 Gessner Rd  
Houston, TX 77024  
281.646.2400 tel  
www.aecom.com

REGISTRATION



03/07/2025

KEYPLAN

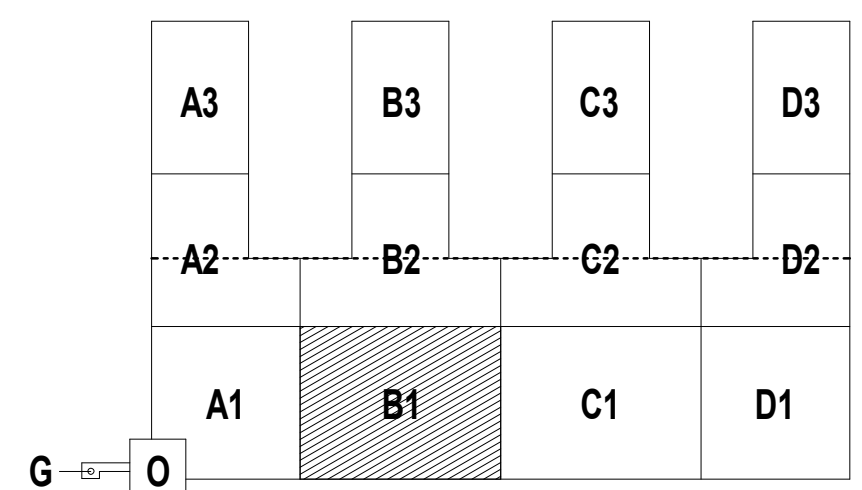

| REV | DATE       | ISSUED BY | TO     | DESCRIPTION            |
|-----|------------|-----------|--------|------------------------|
| 1   | 11/15/2024 | AECOM     | AHJ    | ISSUE FOR BID & PERMIT |
| 4   | 03/07/2025 | AECOM     | ATHEVA | ADDENDUM #3            |

PROJECT NUMBER

60735057

SHEET TITLE

PARTIAL SPINE  
STRUCTURAL SECOND  
FLOOR FRAMING PLAN -  
AREA B1

SHEET NUMBER

S101.2B1

