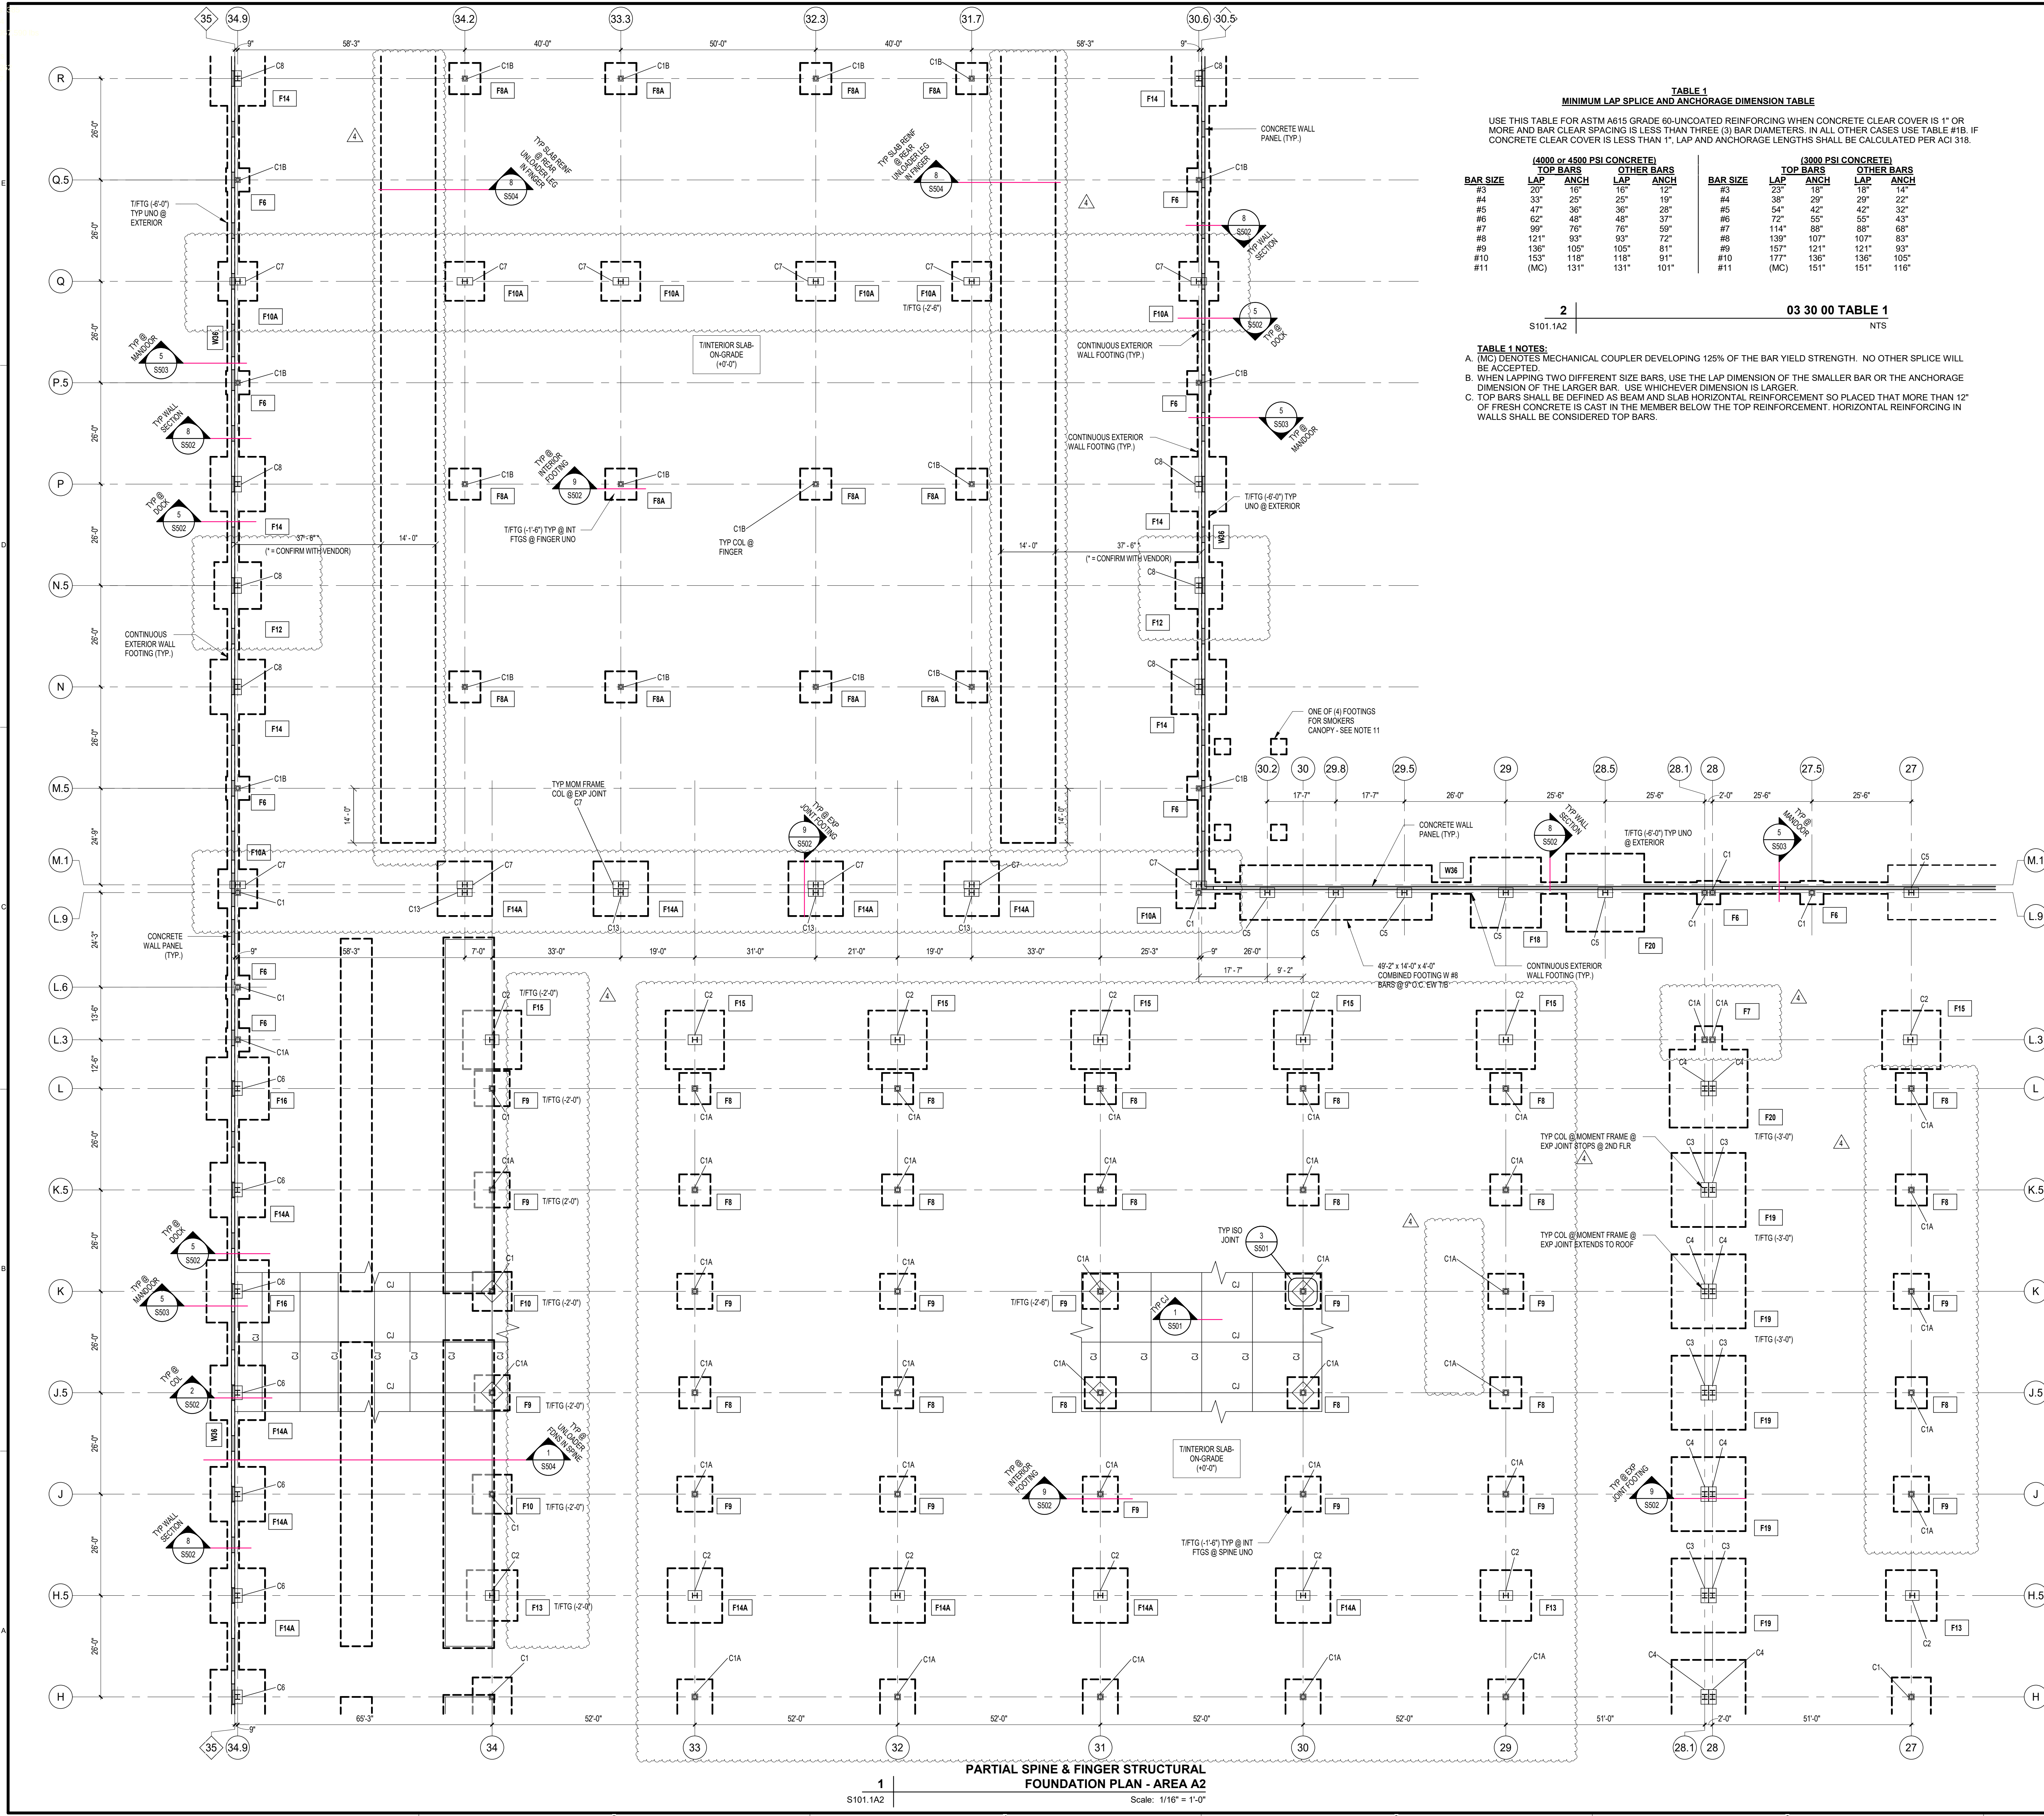




**TABLE 1**  
**MINIMUM LAP SPLICE AND ANCHORAGE DIMENSION TABLE**

USE THIS TABLE FOR ASTM A615 GRADE 60-UNCOATED REINFORCING WHEN CONCRETE CLEAR COVER IS 1" OR MORE AND BAR CLEAR SPACING IS LESS THAN THREE (3) BAR DIAMETERS. IN ALL OTHER CASES USE TABLE #1B. IF CONCRETE CLEAR COVER IS LESS THAN 1", LAP AND ANCHORAGE LENGTHS SHALL BE CALCULATED PER ACI 318.

| BAR SIZE | (4000 or 4500 PSI CONCRETE) |      | OTHER BARS |      | BAR SIZE | (3000 PSI CONCRETE) |      | OTHER BARS |      |
|----------|-----------------------------|------|------------|------|----------|---------------------|------|------------|------|
|          | LAP                         | ANCH | LAP        | ANCH |          | LAP                 | ANCH | LAP        | ANCH |
| #3       | 20"                         | 16"  | 16"        | 12"  | #3       | 23"                 | 18"  | 18"        | 14"  |
| #4       | 33"                         | 25"  | 25"        | 19"  | #4       | 38"                 | 29"  | 29"        | 22"  |
| #5       | 47"                         | 36"  | 36"        | 28"  | #5       | 54"                 | 42"  | 42"        | 32"  |
| #6       | 62"                         | 48"  | 48"        | 37"  | #6       | 72"                 | 55"  | 55"        | 43"  |
| #7       | 99"                         | 76"  | 76"        | 59"  | #7       | 114"                | 88"  | 88"        | 68"  |
| #8       | 121"                        | 93"  | 93"        | 72"  | #8       | 139"                | 107" | 107"       | 83"  |
| #9       | 136"                        | 105" | 105"       | 81"  | #9       | 157"                | 121" | 121"       | 93"  |
| #10      | 153"                        | 118" | 118"       | 91"  | #10      | 177"                | 136" | 136"       | 105" |
| #11      | (MC)                        | 131" | 131"       | 101" | #11      | (MC)                | 151" | 151"       | 116" |

**2** | **03 30 00 TABLE 1**  
S101.1A2 | NTS

**TABLE 1 NOTES:**  
A. (MC) DENOTES MECHANICAL COUPLER DEVELOPING 125% OF THE BAR YIELD STRENGTH. NO OTHER SPLICE WILL BE ACCEPTED.  
B. WHEN LAPPING TWO DIFFERENT SIZE BARS, USE THE LAP DIMENSION OF THE SMALLER BAR OR THE ANCHORAGE DIMENSION OF THE LARGER BAR. USE WHICHEVER DIMENSION IS LARGER.  
C. TOP BARS SHALL BE DEFINED AS BEAM AND SLAB HORIZONTAL REINFORCEMENT SO PLACED THAT MORE THAN 12" OF FRESH CONCRETE IS CAST IN THE MEMBER BELOW THE TOP REINFORCEMENT. HORIZONTAL REINFORCING IN WALLS SHALL BE CONSIDERED TOP BARS.

**FOUNDATION PLAN NOTES:**

- SEE SHEET S203 FOR SLAB-ON-GROUND DETAILS. T/S LAB-ON-GROUND ELEVATION ABOVE MEAN SEA LEVEL = 845'-0" TO BE DATUM ELEVATION = +0'-0".
- SEE S101.10F FOR FOUNDATION DETAILS AT OFFICE BUMP-OUT.
- MAXIMUM CONTRACTION JOINT SPACING = 15'-0". SEE SHEET S501 FOR CONTROL AND CONSTRUCTION JOINT DETAILS.
- FOR DOOR OPENING SIZES AND LOCATIONS IN EXTERIOR WALLS SEE ARCHITECTURAL DRAWINGS.
- FOR SLAB AND FOUNDATION PENETRATIONS, SEE MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS.
- COORDINATE LOCATIONS, SIZES AND TYPES OF SLAB DEPRESSIONS, EQUIPMENT PADS, EMBEDMENTS AND PENETRATIONS WITH THE ARCHITECTURAL, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS.
- PERIMETER FOUNDATION WALL LOCATION TO COORDINATE WITH WALL PANEL THICKNESS.
- \*F\* DENOTES FOOTING STEP. SEE 23/S501. COORDINATE LENGTH & LOCATION OF FOOTING STEP WITH CONCRETE WALL PANEL LAYOUT.
- \*C\* DENOTES COLUMN MARK. SEE SCHEDULE ON THIS SHEET.
- \*F\* DENOTES FOOTING MARK. SEE SCHEDULE ON THIS SHEET.
- CANOPY FOUNDATIONS DESIGNED BY CANOPY MANUFACTURER (SIZE SHOWN AS PLACEHOLDER). COORDINATE FINAL LOCATION AND SIZE OF CANOPY FOUNDATIONS TO AVOID UNDERMINING BUILDING FOUNDATIONS.
- PROVIDE KNOCKOUT PANELS IN WALL FOR FUTURE DOOR DOOR OPENINGS AT THIS END OF FINGERS. SEE ARCH DRAWINGS AND S800 FOR REINFORCING AROUND FUTURE OPENINGS.

**PROJECT**  
**HUMMINGBIRD**  
**CENTRAL HUB GEN1.0 V1.1**  
2134 BLUE CREEK ROAD  
HOGANVILLE, GA 30230

**CLIENT**  
SEEFRED DEV. MANAGEMENT INC.  
3333 RIVERWOOD PKWY, SUITE 200  
ATLANTA, GA 30339

**ARCHITECT**  
ARCHITECT OF RECORD  
AECOM  
800 Gessner Rd  
Houston, TX 77024  
281.646.2400 tel  
www.aecom.com

**ENGINEERS/CONSULTANTS**  
STRUCTURAL  
AECOM  
277 Nationwide Blvd  
Columbus, OH 43215  
281.646.2400 tel  
www.aecom.com

**MEP**  
AECOM  
800 Gessner Rd  
Houston, TX 77024  
281.646.2400 tel  
www.aecom.com

**IT / SECURITY**  
AECOM  
800 Gessner Rd  
Houston, TX 77024  
281.646.2400 tel  
www.aecom.com

**FIRE PROTECTION / ALARM**  
AECOM  
800 Gessner Rd  
Houston, TX 77024  
281.646.2400 tel  
www.aecom.com

**FOOTING SCHEDULE**

| FOOTING MARK | SIZE (LxWxH)        | REINFORCING (BOTTOM, UNO)               | REFERENCE |
|--------------|---------------------|-----------------------------------------|-----------|
| F4           | 4'-0"x1'-0"x1'-6"   | w/ (10) - #6 Bars Each Way              |           |
| F5           | 5'-0"x5'-0"x1'-9"   | w/ (11) - #6 Bars Each Way              |           |
| F6           | 6'-0"x6'-0"x1'-9"   | w/ (8) - #6 Bars Each Way               |           |
| F7           | 7'-0"x7'-0"x2'-0"   | w/ (9) - #6 Bars Each Way               |           |
| F8           | 8'-0"x8'-0"x2'-0"   | w/ (10) - #6 Bars Each Way              |           |
| F8A          | 8'-0"x8'-0"x1'-9"   | w/ (9) - #6 Bars Each Way Top & Bottom  |           |
| F9           | 9'-0"x9'-0"x2'-6"   | w/ (14) - #6 Bars Each Way              |           |
| F10          | 10'-0"x10'-0"x2'-6" | w/ (11) - #7 Bars Each Way              |           |
| F10A         | 10'-0"x10'-0"x3'-0" | w/ (18) - #6 Bars Each Way Top & Bottom |           |
| F11          | 11'-0"x11'-0"x2'-6" | w/ (14) - #7 Bars Each Way              |           |
| F12          | 12'-0"x12'-0"x3'-0" | w/ (15) - #8 Bars Each Way Top & Bottom |           |
| F13          | 13'-0"x13'-0"x4'-0" | w/ (16) - #8 Bars Each Way Top & Bottom |           |
| F14          | 14'-0"x14'-0"x3'-0" | w/ (14) - #8 Bars Each Way Top & Bottom |           |
| F14A         | 14'-0"x14'-0"x4'-0" | w/ (20) - #8 Bars Each Way Top & Bottom |           |
| F15          | 15'-0"x15'-0"x4'-0" | w/ (21) - #8 Bars Each Way Top & Bottom |           |
| F16          | 16'-0"x16'-0"x4'-0" | w/ (24) - #8 Bars Each Way Top & Bottom |           |
| F18          | 18'-0"x18'-0"x4'-0" | w/ (25) - #8 Bars Each Way Top & Bottom |           |
| F19          | 19'-0"x19'-0"x4'-0" | w/ (25) - #8 Bars Each Way Top & Bottom |           |
| F20          | 20'-0"x20'-0"x4'-0" | w/ (27) - #8 Bars Each Way Top & Bottom |           |

**COLUMN SCHEDULE**

ALL COLUMNS WITH A FLANGE THICKNESS EXCEEDING 2 INCHES SHALL BE SUPPLIED WITH SUPPLEMENTARY CHAMFY V-NOTCH REQUIREMENT S30.

| COLUMN MARK | COLUMN SIZE  | BASEPLATE SIZE (L x W x L) | Description |
|-------------|--------------|----------------------------|-------------|
| C1          | HSS12x12x5/8 | 2' x 16' x 16'             |             |
| C1A         | HSS12x12x1/2 | 1 1/2' x 16' x 16'         |             |
| C1B         | HSS10x10x1/2 | 1' x 16' x 16'             |             |
| C2          | W14x26       | 3 1/2' x 30' x 42'         |             |
| C3          | W16x26       | 4'-0" x 22' x 45'          |             |
| C4          | W14x26       | 4' x 22' x 45'             |             |
| C5          | W14x31       | 4'-3" x 30' x 45'          |             |
| C6          | W14x21       | 3 1/2' x 30' x 42'         |             |
| C7          | W14x21       | 3'-0" x 28' x 48'          |             |
| C8          | W14x21       | 3' x 22' x 48'             |             |
| C9          | W10x6        | 1' x 11' x 16'             |             |
| C10         | W12x15       | 2' x 16' x 16'             |             |
| C11         | HSS8x8x3/8   | 1' x 12' x 12'             |             |
| C12         | HSS8x8x3/8   | 1' x 14' x 14'             |             |
| C13         | W14x26       | 4' x 22' x 45'             |             |

**REGISTRATION**

3-07-25

03/07/2025

**KEYPLAN**

A3 B3 C3 D3  
A2 B2 C2 D2  
A1 B1 C1 D1

**PROJECT NUMBER**  
60735057

**SHEET TITLE**  
PARTIAL SPINE & FINGER STRUCTURAL FOUNDATION PLAN - AREA A2

**SHEET NUMBER**  
S101.1A2

