




1 EXISTING ROOF FRAMING PLAN

- EXISTING FRAMING SHOWN IS APPROXIMATE. VERIFY IN FIELD ALL EXISTING BEAM SIZES, TYPES, SPANS, SPACING, ETC. PRIOR TO CONSTRUCTION.
- COORDINATE ALL ROOFTOP UNITS WITH MECHANICAL DRAWINGS.


2 NEW BEAM BEARING AT EXISTING CMU

SCALE: 3/4" = 1'-0"

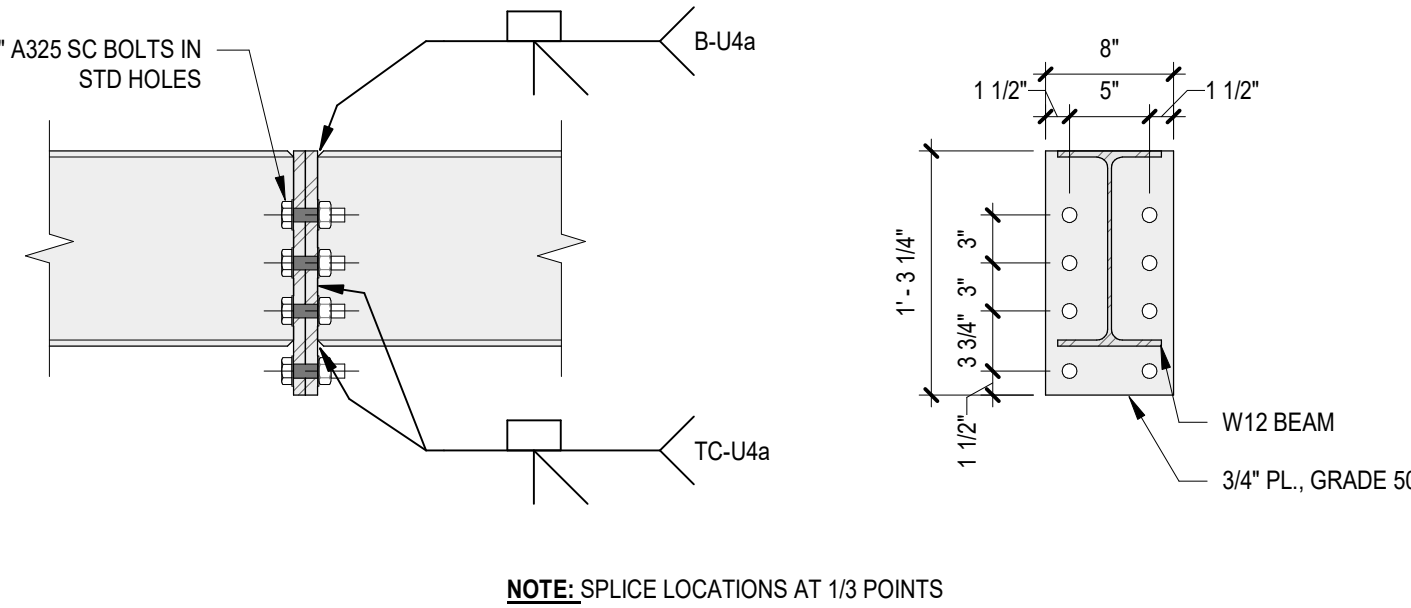


4 BEAM SPLICE

SCALE: 1" = 1'-0"

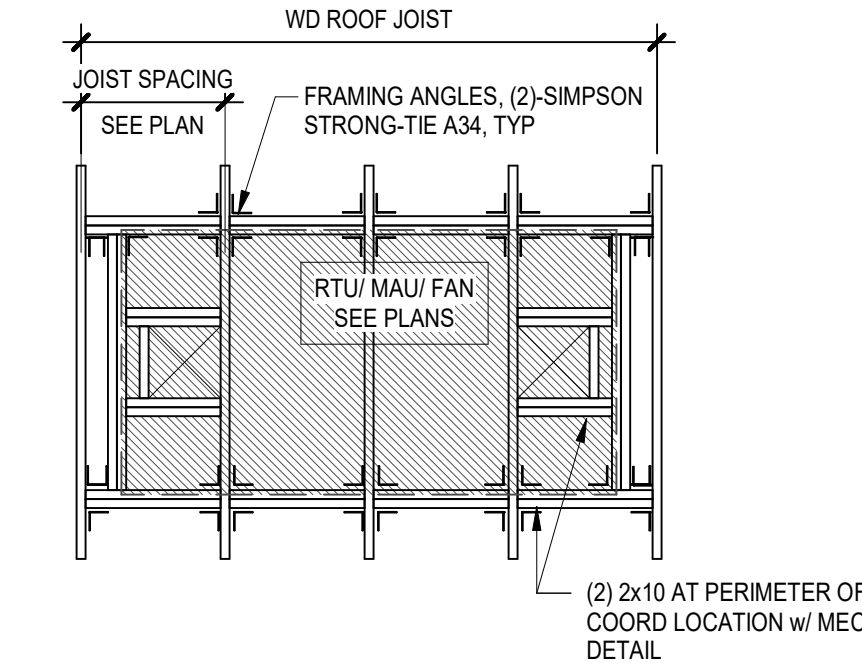

6 TYPICAL MECHANICAL UNIT SUPPORT

SCALE: 3/8" = 1'-0"

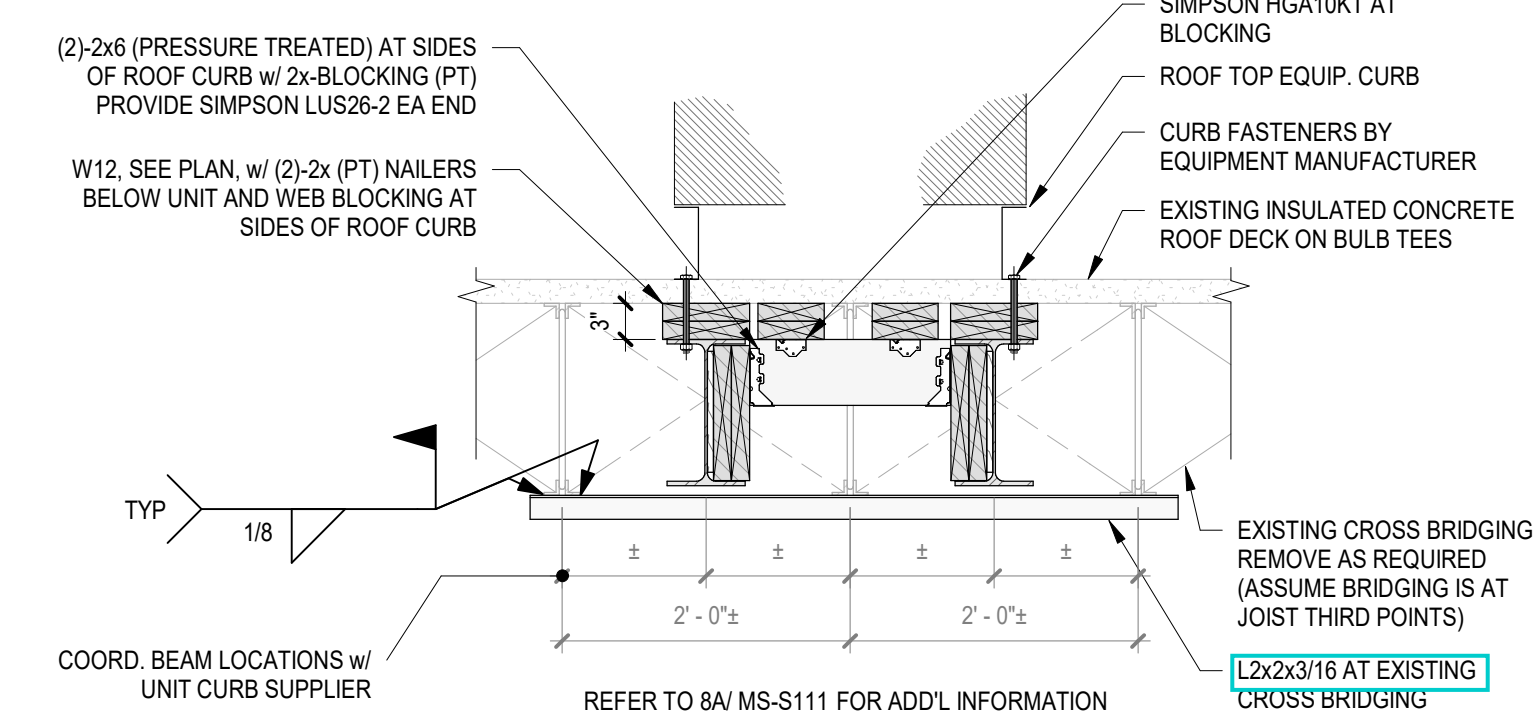

8 SECTION AT FRAMING

SCALE: 3/4" = 1'-0"

MASONRY OPENING (M.O.)	MASONRY WALL THICKNESS		
	4"	6"	12"
3'-0"	L3-1/2x3-1/2x1/4	(2)L3-1/2x2-1/2x1/4	(2)L3-1/2x3-1/2x1/4
4'-0"	L4x3-1/2x1/4	(2)L4x2-1/2x1/4	(2)L4x3-1/2x1/4
6'-0"	L5x3-1/2x5/16	(2)L5x2-1/2x5/16	(2)L5x3-1/2x5/16
8'-0"	L6x3-1/2x5/16	(2)L6x2-1/2x5/16	(2)L6x3-1/2x5/16


- NOTES:**
1. LINTELS IN EXTERIOR WALLS SHALL BE HOT-DIPPED GALVANIZED.
 2. ANGLES SHALL BE LONG-LEG VERTICAL UNLESS NOTED OTHERWISE.
 3. BEARING LENGTH AT EACH END SHALL BE 8" MINIMUM.
 4. LINTELS IN EXTERIOR WALLS SHALL HAVE A MINIMUM THICKNESS OF 5/16".
 5. COORDINATE EXACT SIZE, LOCATION AND QUANTITY WITH ARCHITECTURAL, MECHANICAL AND ELECTRICAL DWG's.

9 TYPICAL NON-BEARING-WALL LOOSE LINTEL SCHEDULE

SCALE: 3/4" = 1'-0"


3 NEW BEAM BEARING AT EXISTING CLAY TILE

SCALE: 3/4" = 1'-0"

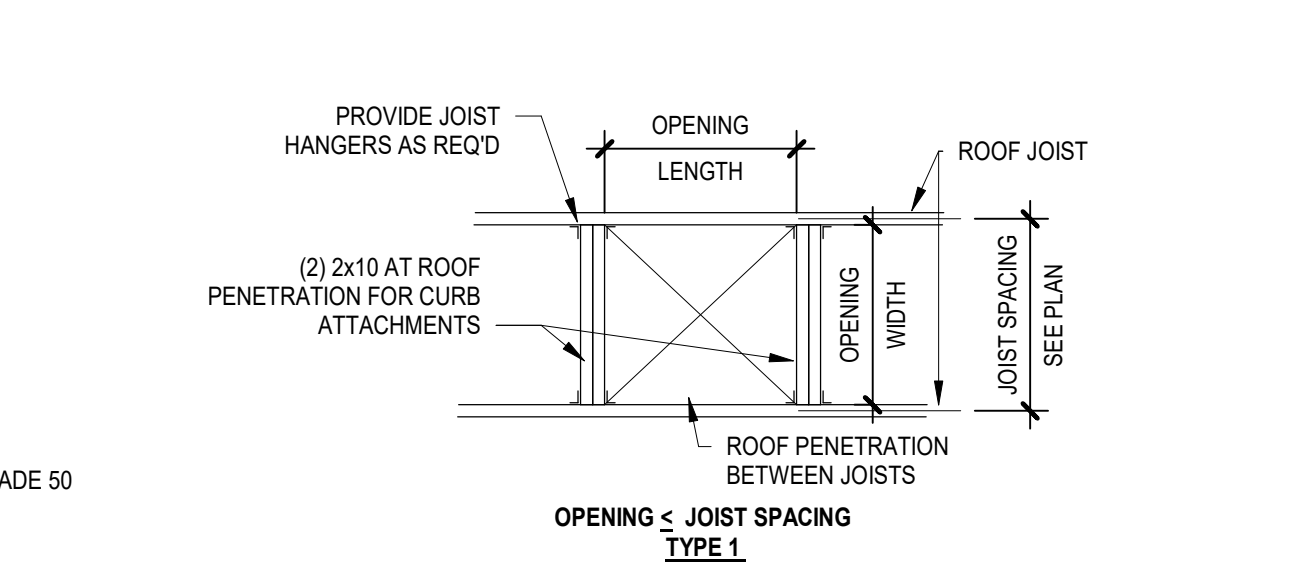


5 TYPICAL WOOD ROOF PENETRATION

SCALE: 1/2" = 1'-0"

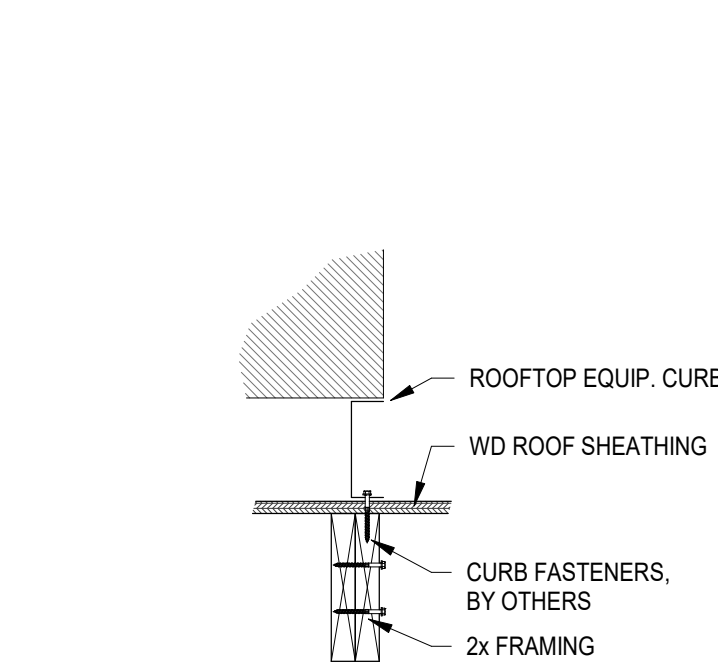


7 DETAIL AT CURB

SCALE: 1" = 1'-0"

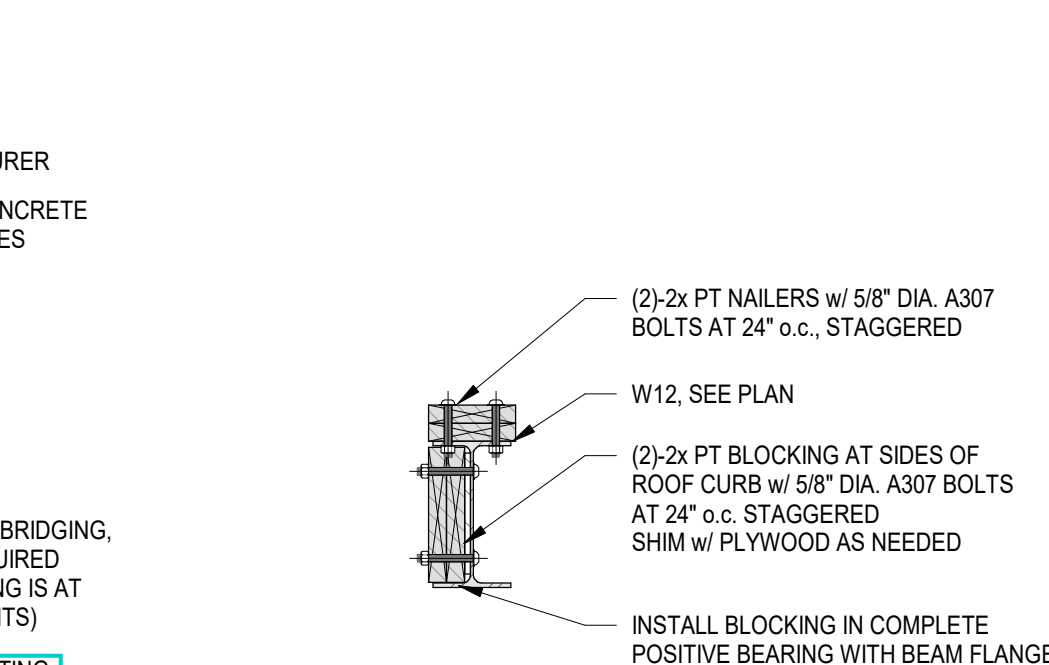

8A BLOCKING AND NAILER FASTENING

SCALE: 3/4" = 1'-0"

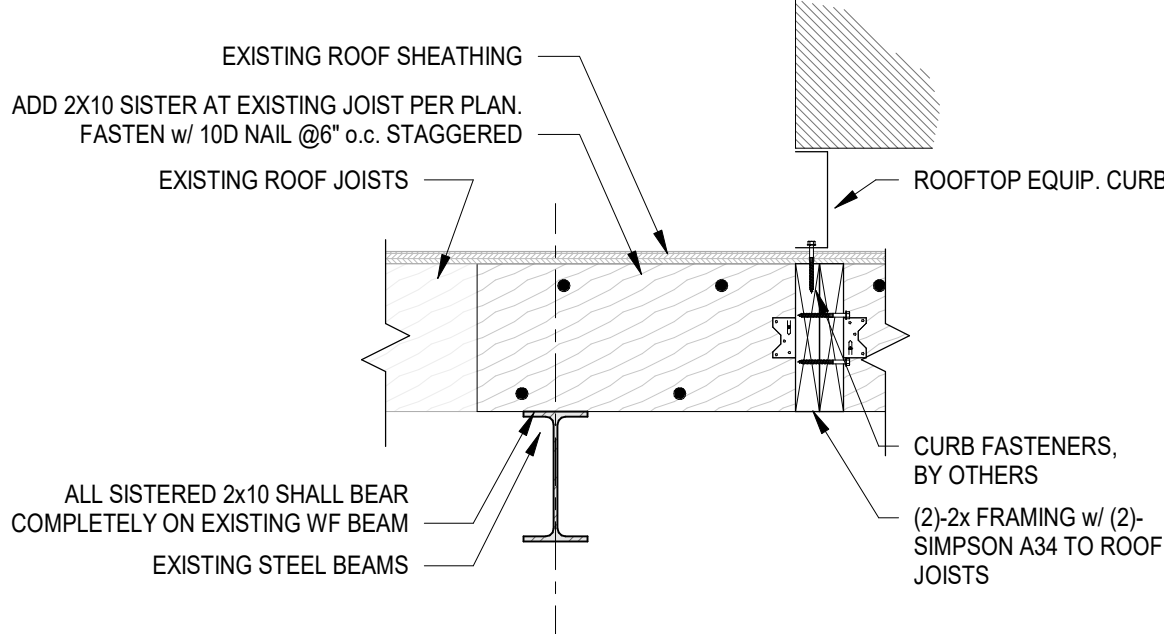

10 TYPICAL WOOD JOIST REINFORCEMENT

SCALE: 1" = 1'-0"



LYNDONVILLE CENTRAL
SCHOOLS
ELEMENTARY SCHOOL
MAIN STREET LYNDONVILLE, NY
14098

SED #: 45-10-01-04-0-001-018
SED #: 45-10-01-04-0-002-009

2023 CAPITAL IMPROVEMENT
PROJECT PHASE 2
CONSTRUCTION DOCUMENTS



237 Main Street, Suite 500
Buffalo, NY 14202
www.wendelcompanies.com
p.716.688.0766 tf.877.293.6335

Wendel WD Architecture, Engineering, Surveying and
Landscape Architecture, P.C.

NOTE:
THIS DOCUMENT AND THE EXISTING CONDITIONS INCORPORATED HEREIN, AS AN INSTRUMENT OF PROFESSIONAL SERVICE, IS THE PROPERTY OF THE ARCHITECT AND ENGINEER AND IS NOT TO BE USED IN WHOLE OR IN PART FOR ANY OTHER PROJECT WITHOUT THE WRITTEN AUTHORIZATION OF THE ARCHITECT AND ENGINEER. UNAUTHORIZED ALTERATION OR ADDITION TO ANY SURVEY, DRAWING, DESIGN, SPECIFICATION, PLAN OR REPORT IS PROHIBITED IN ACCORDANCE WITH STATE LAW, CODE AND RULES.

NO.	REVISIONS	DATE
1	ISSUED FOR BIDS	11-12-2023

DWS:FILE

ROOF FRAMING PLAN AND
DETAILS



SCALE BAR SHOWN IS TWO INCHES ON THE ORIGINAL DRAWING
IF NOT TWO INCHES ON THIS SHEET, ADJUST ACCORDINGLY
DATE 11-12-2023
SCALE As indicated
DWN. DWS CHK. MAW/JDM
PROJ. No. 628101
DWG. No.

MS-S111



1 GYMNASIUM REINFORCEMENT ROOF FRAMING PLAN

SCALE: 1/8" = 1'-0"

PARTIAL ROOF FRAMING PLAN NOTES


- EXISTING FRAMING SIZES AND LOCATIONS SHOWN ARE APPROXIMATE. VERIFY EXISTING CONDITIONS IN THE FIELD AND NOTIFY ENGINEER OF DISCREPANCIES.
- CONTRACTOR TO VERIFY IN FIELD EXISTING ANGLE FRAME CONDITIONS AT ROOF TOP UNITS TO BE REPLACED. NOTIFY ENGINEER OF EXISTING CONDITIONS. DEMOLISH EXISTING ANGLE FRAMES IF REQUIRED AND REPLACE WITH NEW ANGLE FRAMES. STEEL FRAMES ARE REQUIRED AT UNSUPPORTED UNIT AND PENETRATION EDGES.
- REFER TO MECHANICAL DRAWINGS FOR INFORMATION RELATED TO ROOFTOP-MOUNTED EQUIPMENT AND PENETRATIONS.
- EQUIPMENT WEIGHTS SHOWN INCLUDE AN ALLOWANCE FOR UNIT CURB WEIGHT. SUBMIT CURB AND UNIT DATA, INCLUDING WEIGHTS, TO ENGINEER FOR REVIEW.
- INDICATES AREA OF EXISTING ROOF OPENINGS TO BE INFILLED WITH 1 1/2"x18ga GALV (G60) TYPE B METAL ROOF DECK.

KEYNOTE LEGEND	
NO.	COMMENTS
1	COMMERCIALLY BLAST CLEAN EXISTING EXPOSED STEEL FRAMING. REMOVE ALL RUST DOWN TO BARE METAL PER SSPC-SP10/NAACE 2 NEAR-WHITE SPECIFICATIONS. PRIME AND PAINT EXISTING STEEL FRAMING w/ A HIGH-PERFORMANCE COATING SYSTEM PER SPECIFICATION DIVISION 09.01 REQUIREMENTS.
2	EXISTING UNIT TO BE REPLACED. COORD. w/ MECH. AND RE-USE EXISTING ANGLE CHANNEL FRAME FOR UNIT CURB SUPPORT.




7 44LH JOIST ELEVATION

SCALE: 1/4" = 1'-0"

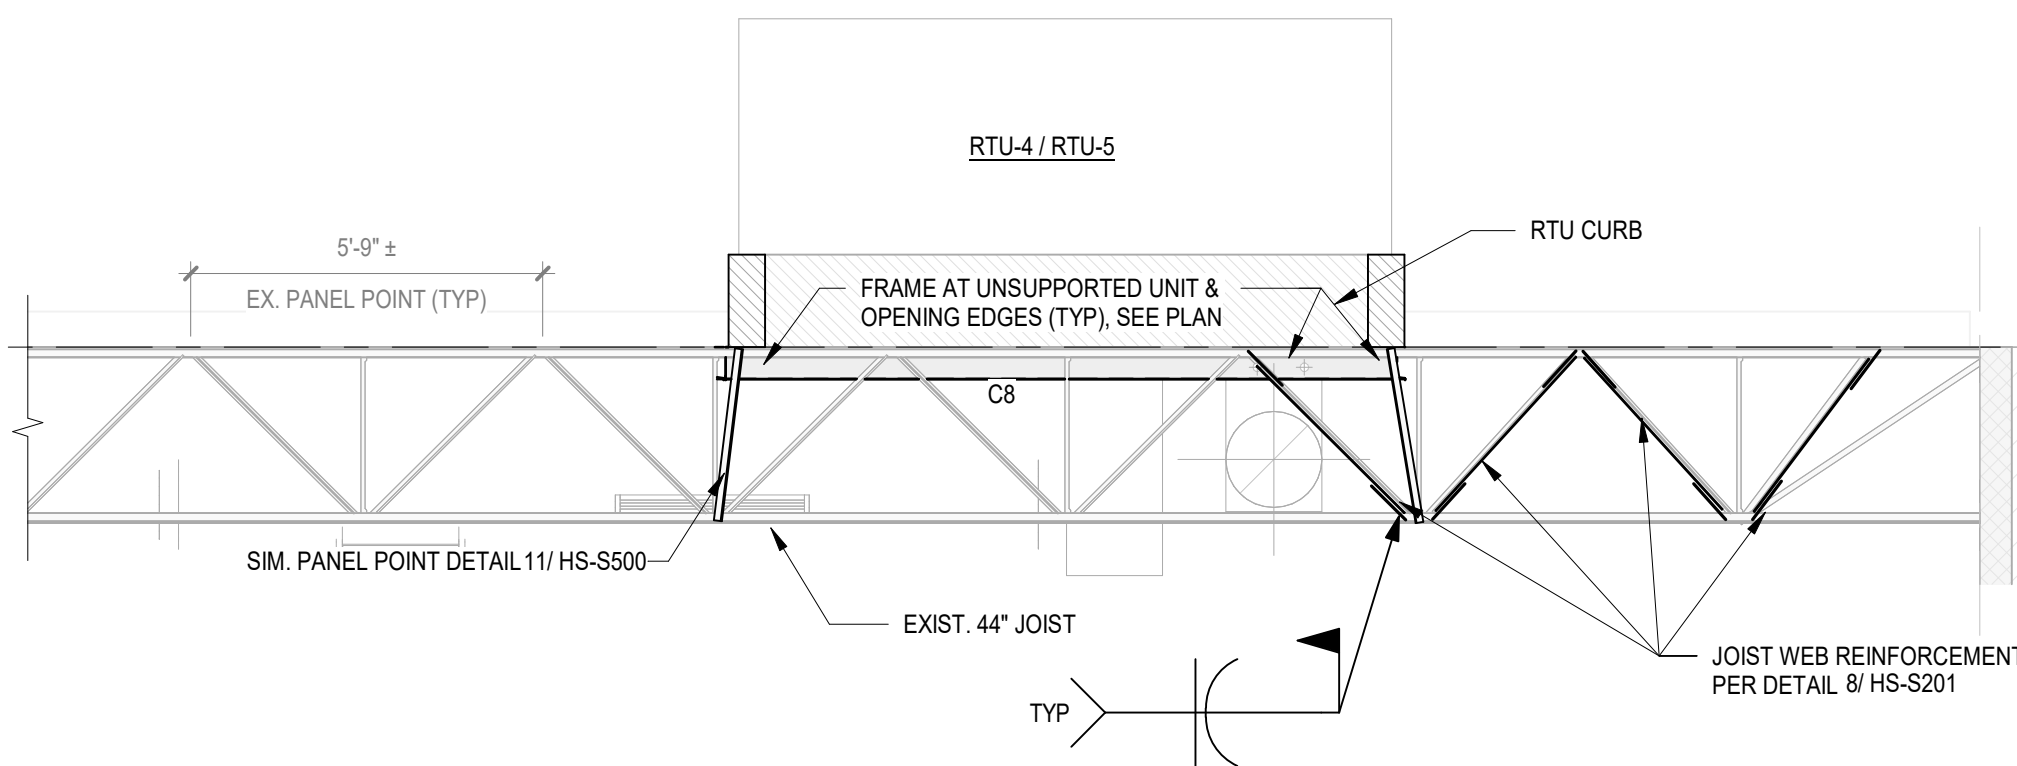

2 RTU SUPPORT MUSIC WING

SCALE: 1/8" = 1'-0"

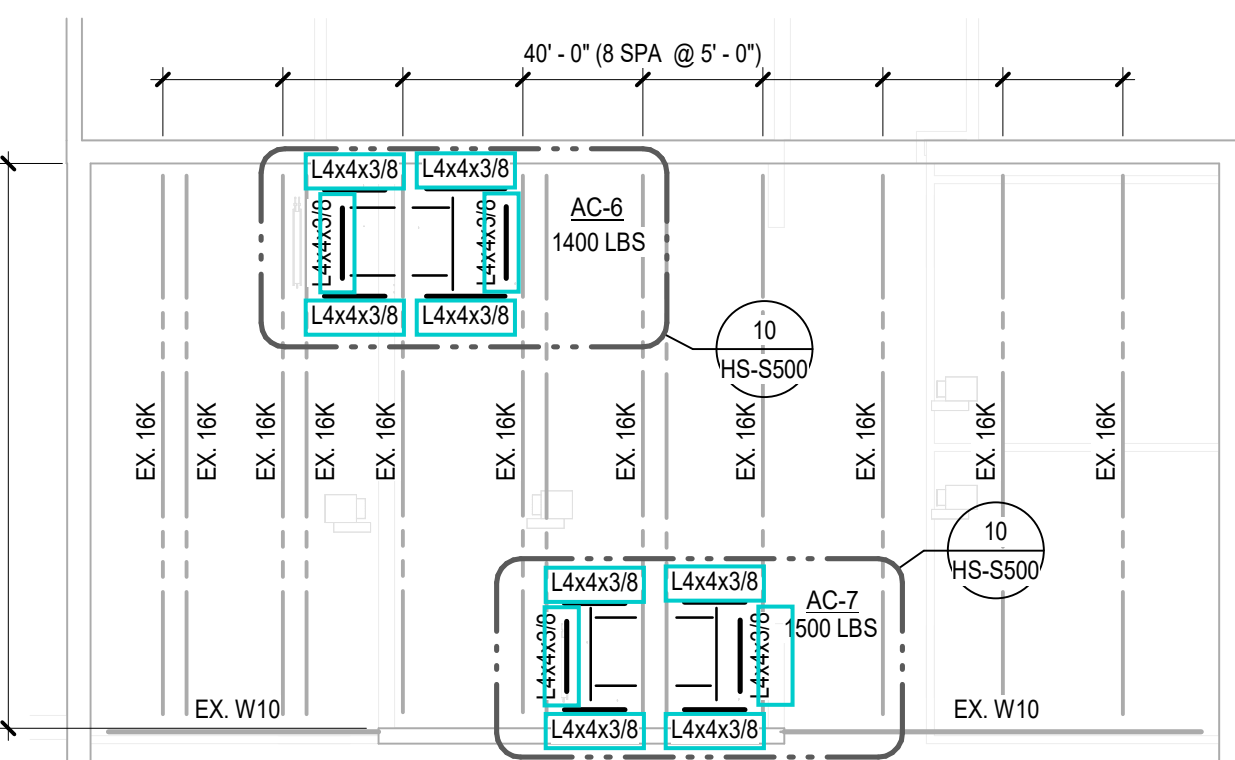


5 RTU SUPPORT FRAMING AC-6 & AC-7

SCALE: 1/8" = 1'-0"


6 TYPICAL PLATE CONNECTION TO EXISTING WALL

SCALE: 3/4" = 1'-0"

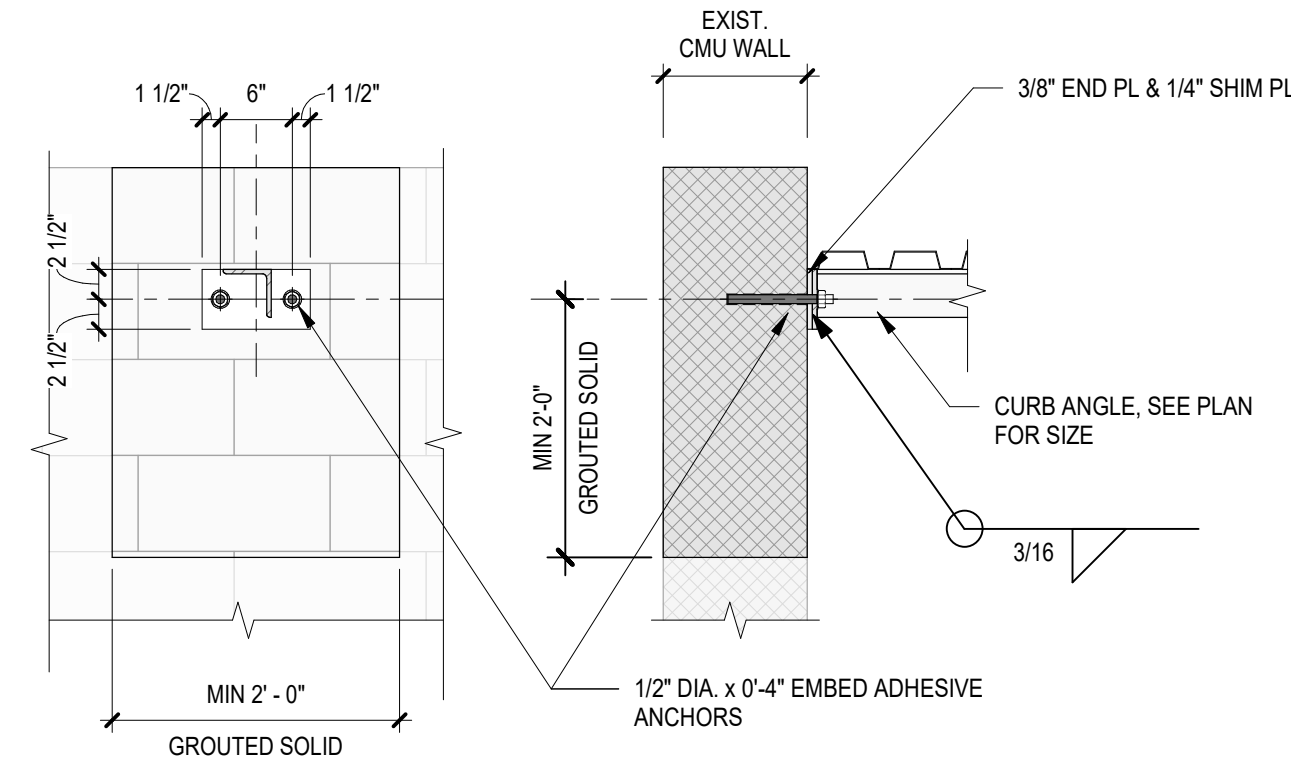


8 EXISTING JOIST REINFORCEMENT WITH ANGLE WEB DETAIL

SCALE: 3/4" = 1'-0"

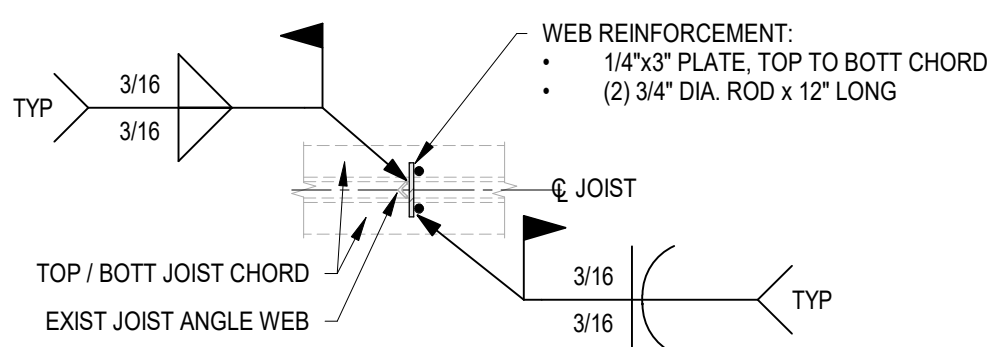


3 RTU SUPPORT FRAMING AC-4 & AC-5

SCALE: 1/8" = 1'-0"

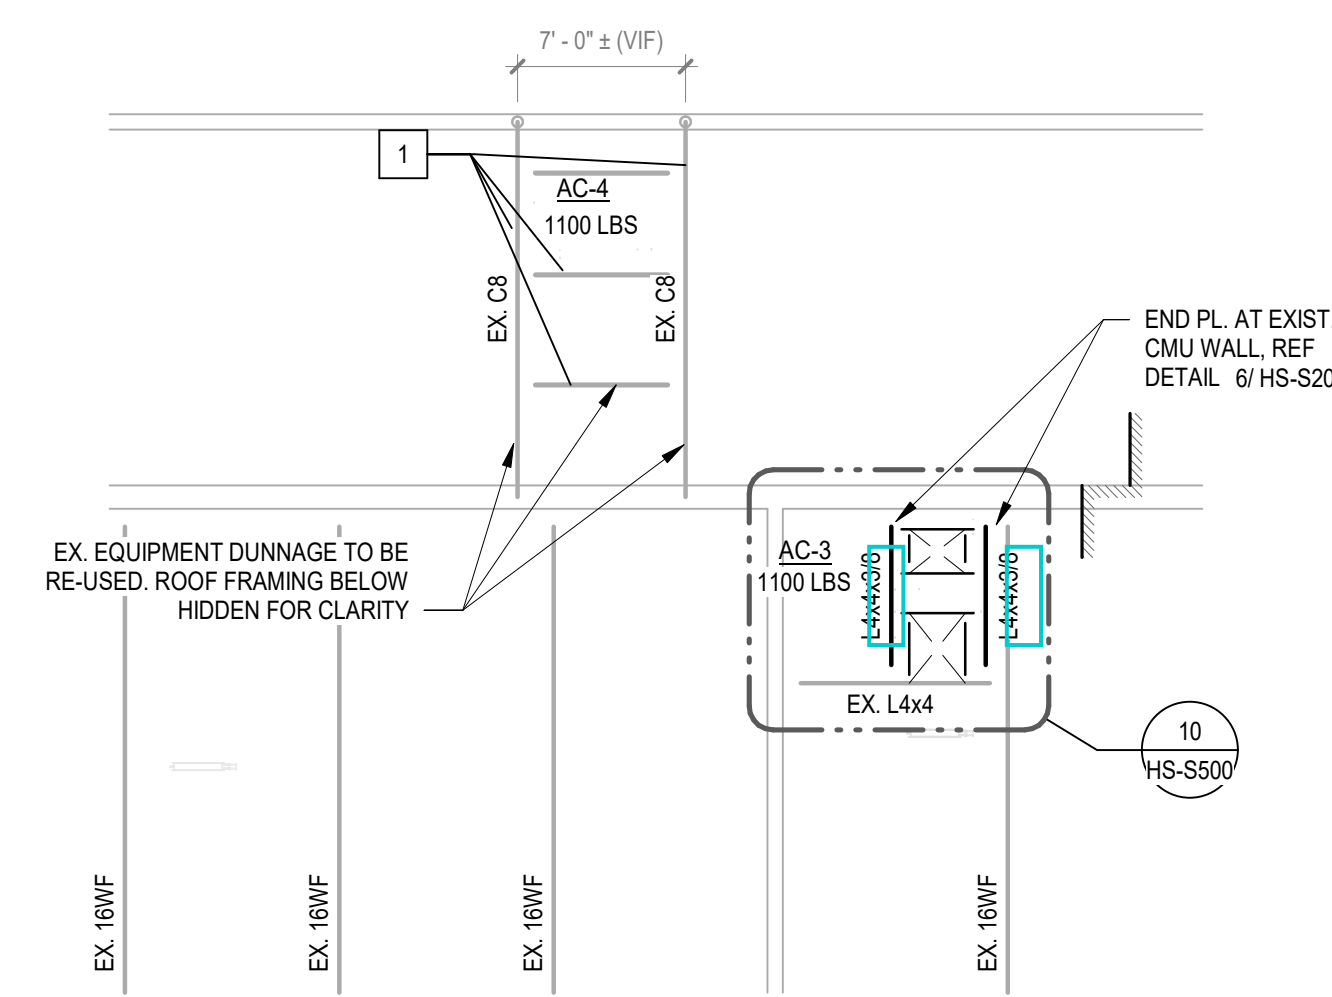

4 RTU AC-16 SUPPORT FRAMING

SCALE: 1/8" = 1'-0"

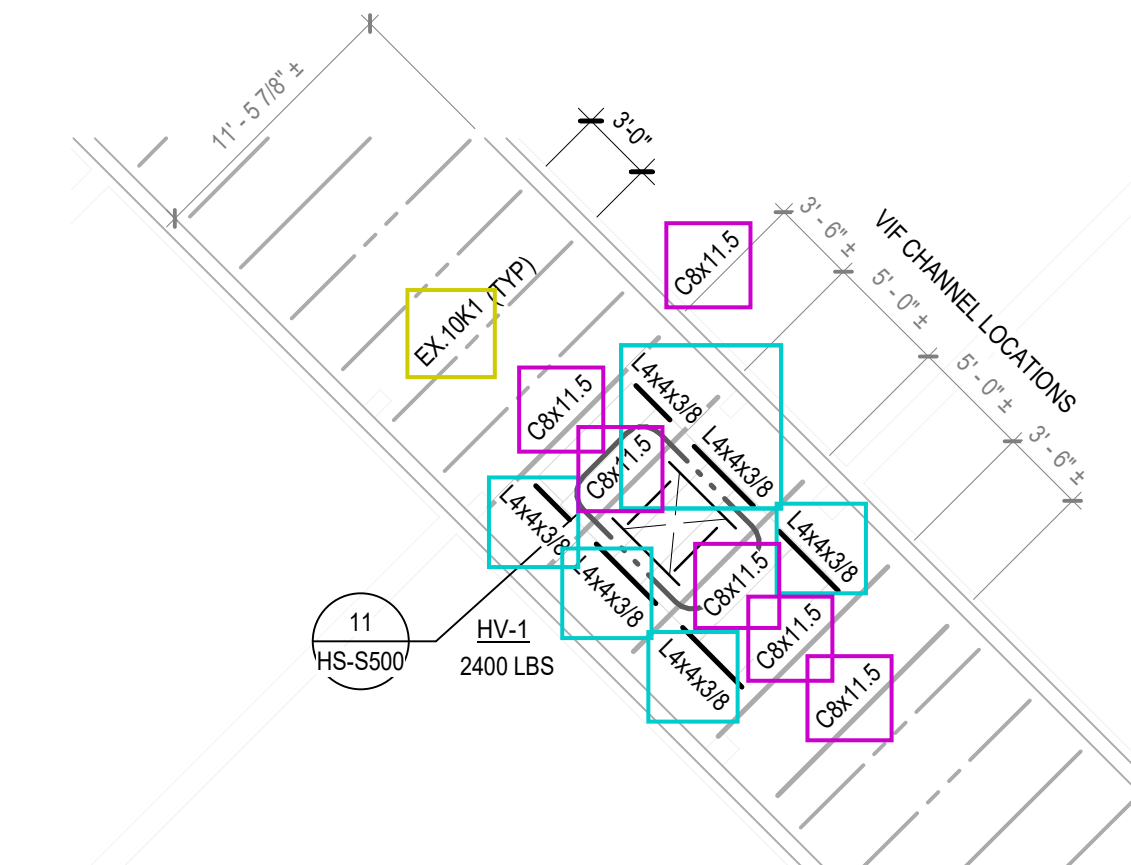

LYNDONVILLE CENTRAL
SCHOOL DISTRICT
25 HOUSEL AVENUE
LYNDONVILLE, NEW YORK,
14098


SED #: 45-10-01-04-0-001-018
SED #: 45-10-01-04-0-002-009

2023 CAPITAL IMPROVEMENT
PROJECT PHASE 2
CONSTRUCTION DOCUMENTS



Centerpointe Corporate Park
375 Essjay Road, Suite 200
Williamsville, NY 14221
www.wendelcompanies.com
p.716.688.0766 tf.877.293.6335

Wendel W.D. Architecture, Engineering, Surveying and
Landscape Architecture, P.C.

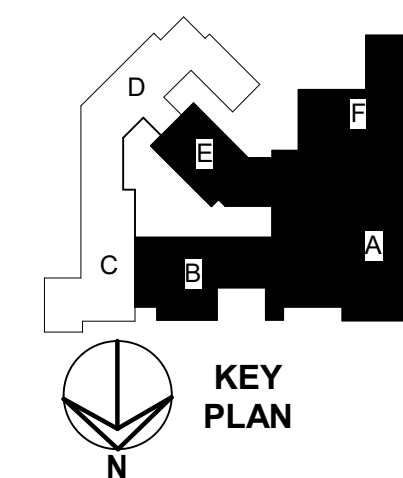

NOTE:
THIS DOCUMENT AND THE EXISTING CONDITIONS INCORPORATED HEREIN, AS AN INSTRUMENT OF PROFESSIONAL SERVICE, IS THE PROPERTY OF THE ARCHITECT AND ENGINEER AND IS NOT TO BE USED IN WHOLE OR IN PART FOR ANY OTHER PROJECT WITHOUT THE WRITTEN AUTHORIZATION OF THE ARCHITECT AND ENGINEER. UNAUTHORIZED ALTERATION OR ADDITION TO ANY SURVEY DRAWING, DESIGN, SPECIFICATION, PLAN OR REPORT IS PROHIBITED IN ACCORDANCE WITH STATE LAW, CODE AND RULES.

NO.	ISSUED FOR R/S	DATE
1	11-12-2023	

DWG. TITLE
PARTIAL ROOF FRAMING PLANS

DATE	SCALE	DWN.	CHK.
11-12-2023	As indicated	DWS	MAW / JDM
PROJ. No.	628101		
DWG. No.			

HS-S201