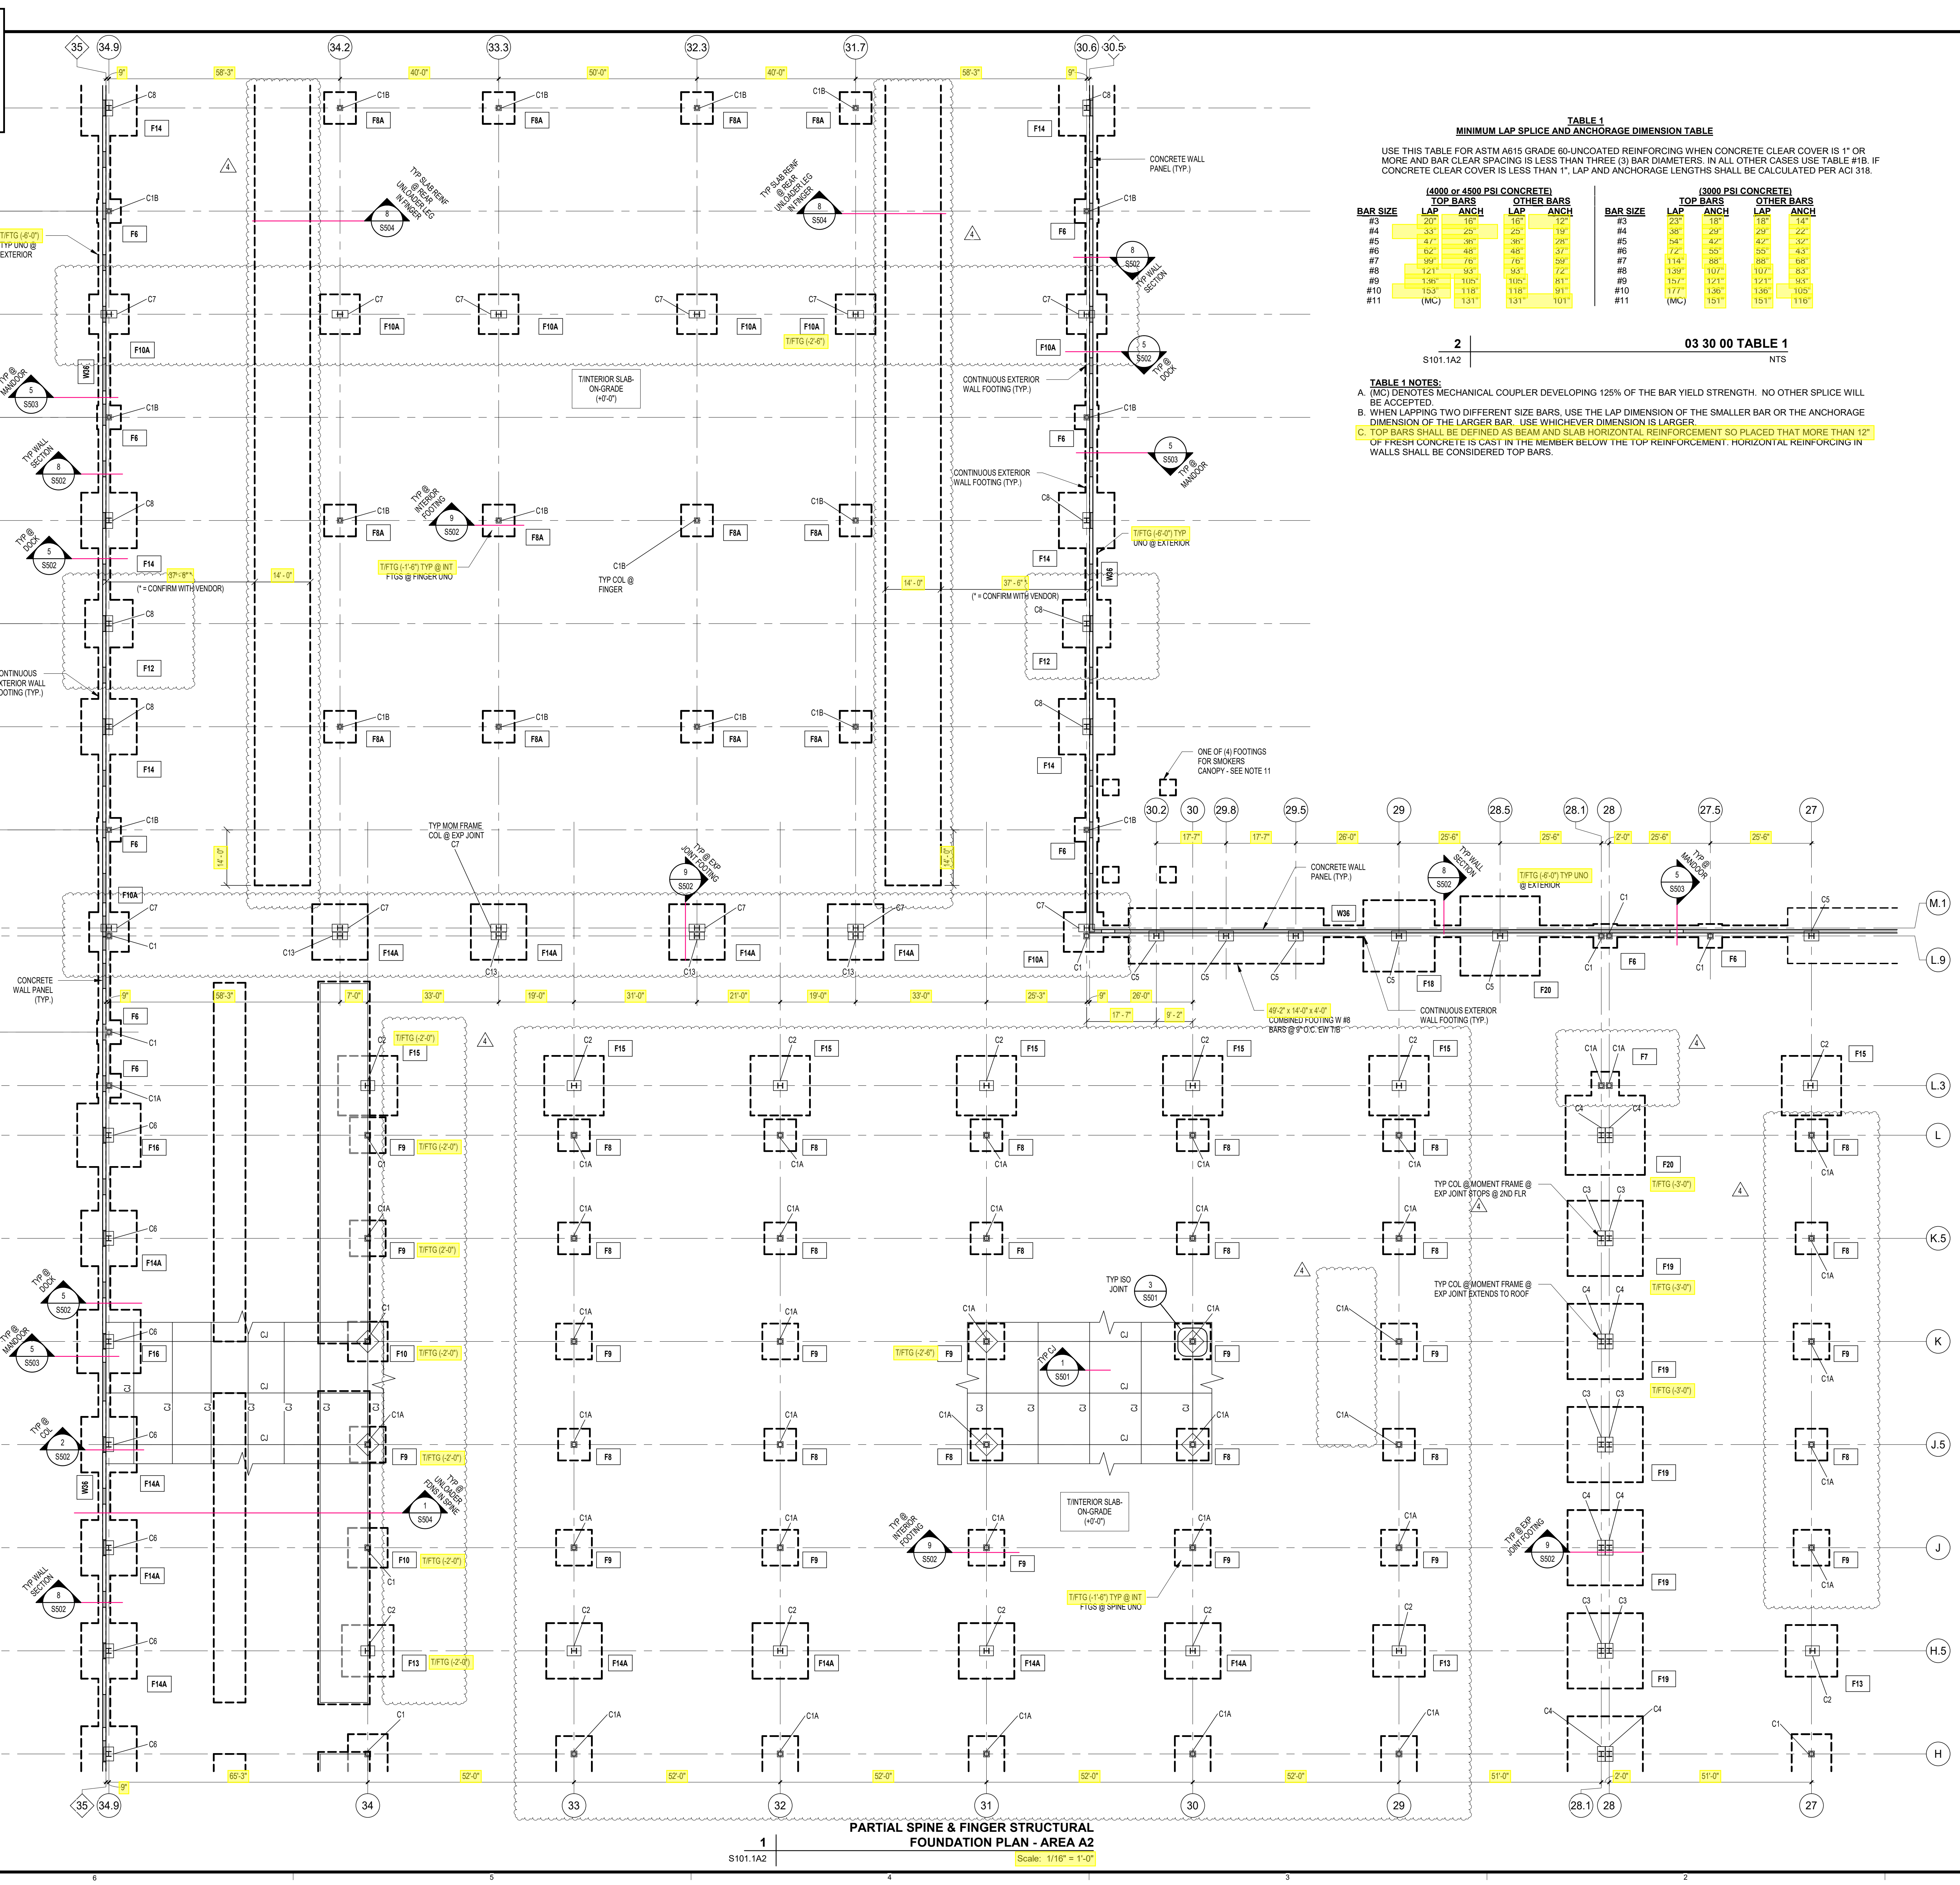




**TABLE 1
MINIMUM LAP SPlice AND ANCHORAGE DIMENSION TABLE**

USE THIS TABLE FOR ASTM A615 GRADE 60-UNCOATED REINFORCING WHEN CONCRETE CLEAR COVER IS 1" OR MORE AND BAR CLEAR SPACING IS LESS THAN THREE (3) BAR DIAMETERS. IN ALL OTHER CASES USE TABLE #1B. IF CONCRETE CLEAR COVER IS LESS THAN 1", LAP AND ANCHORAGE LENGTHS SHALL BE CALCULATED PER ACI 318.

BAR SIZE	(4000 or 4500 PSI CONCRETE)		OTHER BARS		BAR SIZE	(3000 PSI CONCRETE)		OTHER BARS	
	LAP	ANCH	LAP	ANCH		LAP	ANCH	LAP	ANCH
#3	20"	16"	16"	12"	#3	20"	18"	18"	14"
#4	33"	23"	23"	19"	#4	33"	29"	29"	22"
#5	47"	36"	36"	28"	#5	54"	42"	42"	36"
#6	62"	48"	48"	37"	#6	72"	55"	55"	43"
#7	98"	76"	76"	59"	#7	114"	88"	88"	68"
#8	121"	93"	93"	72"	#8	139"	107"	107"	83"
#9	136"	105"	105"	81"	#9	157"	121"	121"	93"
#10	153"	118"	118"	91"	#10	177"	136"	136"	105"
#11	(MC)	131"	131"	101"	#11	(MC)	151"	121"	118"

2 | **03 30 00 TABLE 1** | **NTS**

TABLE 1 NOTES:
A. (MC) DENOTES MECHANICAL COUPLER DEVELOPING 125% OF THE BAR YIELD STRENGTH. NO OTHER SPLICE WILL BE ACCEPTED.
B. WHEN LAPPING TWO DIFFERENT SIZE BARS, USE THE LAP DIMENSION OF THE SMALLER BAR OR THE ANCHORAGE DIMENSION OF THE LARGER BAR. USE WHICHEVER DIMENSION IS LARGER.
C. TOP BARS SHALL BE DEFINED AS BEAM AND HORIZONTAL REINFORCEMENT SO PLACED THAT MORE THAN 12" OF FRESH CONCRETE IS CAST IN THE MEMBER BELOW THE TOP REINFORCEMENT. HORIZONTAL REINFORCING IN WALLS SHALL BE CONSIDERED TOP BARS.

FOUNDATION PLAN NOTES:

- SEE SHEET S203 FOR SLAB-ON-GROUND DETAILS. TISLAB-ON-GROUND ELEVATION ABOVE MEAN SEA LEVEL = 845'-0" TO BE DATUM ELEVATION = +0'-0".
- SEE S101.10F FOR FOUNDATION DETAILS AT OFFICE BUMP-OUT.
- MAXIMUM CONTRACTION JOINT SPACING = 15'-0". SEE SHEET S501 FOR CONTROL AND CONSTRUCTION JOINT DETAILS.**
- FOR DOOR OPENING SIZES AND LOCATIONS IN EXTERIOR WALLS SEE ARCHITECTURAL DRAWINGS.
- FOR SLAB AND FOUNDATION PENETRATIONS, SEE MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS.
- COORDINATE LOCATIONS, SIZES AND TYPES OF SLAB DEPRESSIONS, EQUIPMENT PADS, EMBEDMENTS AND PENETRATIONS WITH THE ARCHITECTURAL, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS.
- PERMETER FOUNDATION WALL LOCATION TO COORDINATE WITH WALL THICKNESS.
- *FS* DENOTES FOOTING STEP. SEE 23/S501. COORDINATE LENGTH & LOCATION OF FOOTING STEP WITH CONCRETE WALL PANEL LAYOUT.
- *CX* DENOTES COLUMN MARK. SEE SCHEDULE ON THIS SHEET.
- *FX* DENOTES FOOTING MARK. SEE SCHEDULE ON THIS SHEET.
- CANOPY FOUNDATIONS DESIGNED BY CANOPY MANUFACTURER (SIZE SHOWN AS PLACEHOLDER). COORDINATE FINAL LOCATION AND SIZE OF CANOPY FOUNDATIONS TO AVOID UNDERMINING BUILDING FOUNDATIONS.
- PROVIDE KNOCKOUT PANELS IN WALL FOR FUTURE DOOR DOOR OPENINGS AT THIS END OF FINGERS. SEE ARCH DRAWINGS AND S580 FOR REINFORCING AROUND FUTURE OPENINGS.

PROJECT

HUMMINGBIRD

CENTRAL HUB GEN1.0 V1.1

2134 BLUE CREEK ROAD
HOGANSVILLE, GA 30230

CLIENT

SEEFRED DEV. MANAGEMENT INC.
3333 RIVERWOOD PKWY, SUITE 200
ATLANTA, GA 30339

ARCHITECT

ARCHITECT OF RECORD
AECOM
800 Gessner Rd
Houston, TX 77024
281.646.2400 tel
www.aecom.com

ENGINEERS/CONSULTANTS

STRUCTURAL
AECOM
277 Nationwide Blvd
Columbus, OH 43215
281.646.2400 tel
www.aecom.com

MEP
AECOM
800 Gessner Rd
Houston, TX 77024
281.646.2400 tel
www.aecom.com

IT / SECURITY
AECOM
800 Gessner Rd
Houston, TX 77024
281.646.2400 tel
www.aecom.com

FIRE PROTECTION / ALARM
AECOM
800 Gessner Rd
Houston, TX 77024
281.646.2400 tel
www.aecom.com

FOOTING SCHEDULE

FOOTING MARK	SIZE (LxWxH)	REINFORCING (BOTTOM, UNO)	REFERENCE
F4	4'-0"x1'-0"x1'-0"	w/ (10) - #6 Bars Each Way	
F5	5'-0"x5'-0"x1'-0"	w/ (11) - #6 Bars Each Way	
F6	6'-0"x6'-0"x1'-0"	w/ (8) - #6 Bars Each Way	
F7	7'-0"x7'-0"x2'-0"	w/ (9) - #6 Bars Each Way	
F8	8'-0"x8'-0"x2'-0"	w/ (10) - #6 Bars Each Way	
F8A	9'-0"x6'-0"x1'-0"	w/ (9) - #6 Bars Each Way Top & Bottom	
F9	9'-0"x9'-0"x2'-0"	w/ (14) - #8 Bars Each Way	
F10	10'-0"x10'-0"x2'-0"	w/ (11) - #7 Bars Each Way	
F10A	10'-0"x10'-0"x3'-0"	w/ (18) - #6 Bars Each Way Top & Bottom	
F11	11'-0"x11'-0"x2'-0"	w/ (14) - #7 Bars Each Way	
F12	12'-0"x12'-0"x3'-0"	w/ (15) - #8 Bars Each Way Top & Bottom	
F13	13'-0"x13'-0"x4'-0"	w/ (16) - #8 Bars Each Way Top & Bottom	
F14	14'-0"x14'-0"x3'-0"	w/ (14) - #8 Bars Each Way Top & Bottom	
F14A	14'-0"x14'-0"x4'-0"	w/ (20) - #8 Bars Each Way Top & Bottom	
F15	15'-0"x15'-0"x4'-0"	w/ (21) - #8 Bars Each Way Top & Bottom	
F16	16'-0"x16'-0"x4'-0"	w/ (24) - #8 Bars Each Way Top & Bottom	
F18	18'-0"x18'-0"x4'-0"	w/ (25) - #8 Bars Each Way Top & Bottom	
F19	19'-0"x19'-0"x4'-0"	w/ (25) - #8 Bars Each Way Top & Bottom	
F20	20'-0"x20'-0"x4'-0"	w/ (27) - #8 Bars Each Way Top & Bottom	

COLUMN SCHEDULE

ALL COLUMNS WITH A FLANGE THICKNESS EXCEEDING 2 INCHES SHALL BE SUPPLIED WITH SUPPLEMENTARY CHAMFY V-NOTCH REQUIREMENT S30.

COLUMN MARK	COLUMN SIZE	BASEPLATE SIZE (L x W x L)	Description
C1	HSS12x12x1/2	2' x 16' x 16'	
C1A	HSS12x12x1/2	1' 1/2' x 16' x 16'	
C1B	HSS10x10x1/2	1' x 16' x 16'	
C2	W14x29	3' 1/2' x 30' x 42'	
C3	W14x29	4' x 23' x 45'	
C4	W14x29	4' x 23' x 45'	
C5	W14x31	3' 1/2' x 30' x 42'	
C7	W14x21	3' x 23' x 48'	
C8	W14x21	3' x 23' x 48'	
C9	W10x6	1' x 11' x 16'	
C10	W12x15	2' x 16' x 16'	
C11	HSS8x8x1/8	1' x 12' x 12'	
C12	HSS8x8x1/8	1' x 14' x 14'	
C13	W14x29	4' x 23' x 45'	

KEYPLAN

